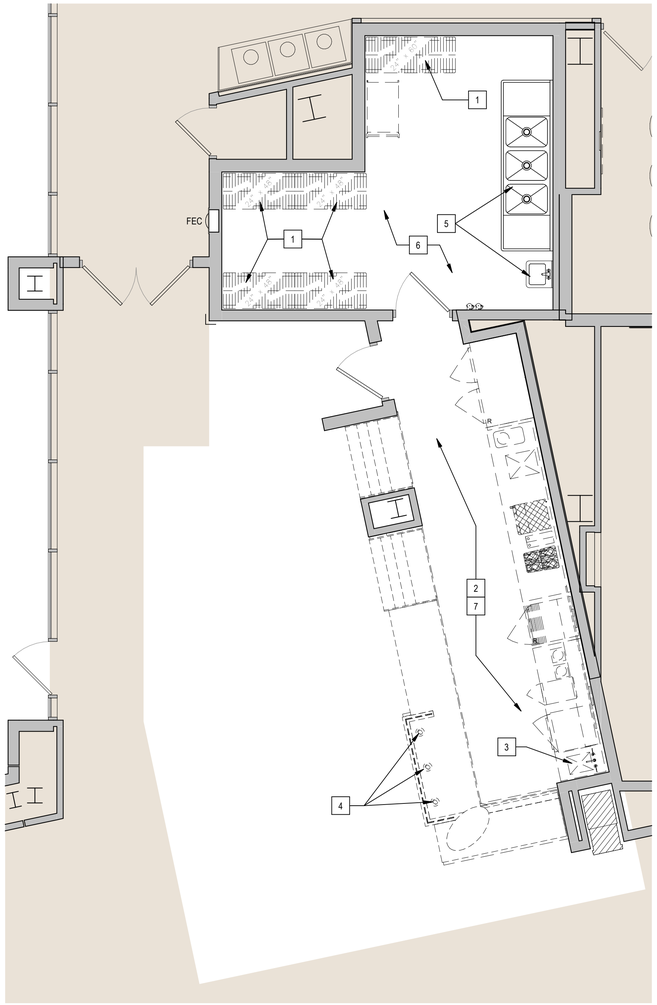

1 FLOOR 1 DEMOLITION PLAN

1/4" = 1'-0"

GENERAL NOTES - DEMOLITION

A. THE FOLLOWING PLANS REFLECT DEMOLITION INTENT ONLY. DEMOLITION IS NOT NECESSARILY LIMITED TO WHAT IS SHOWN ON DRAWINGS AND SHALL INCLUDE RELATED MECHANICAL, ELECTRICAL AND LIFE SAFETY SYSTEMS. THE INTENT IS TO INDICATE THE GENERAL SCOPE OF DEMOLITION REQUIRED TO COMPLETE THE WORK IN ACCORDANCE WITH THE CONTRACT DRAWINGS. SEE SPECIFICATIONS SECTION-02 41 19 FOR FURTHER INSTRUCTIONS.

B. FIRE SAFETY MUST BE MAINTAINED FOR ALL PERSONNEL WORKING ON THE FLOOR. ALL EGRESS ROUTES, ALARMS, SPEAKERS, ETC. MUST REMAIN ACCESSIBLE AND OPERABLE AT ALL TIMES. IMMEDIATELY NOTIFY PROPERTY SECURITY CONSULTANT AND PROPERTY MANAGER OF DAMAGED OR DISABLED SYSTEMS AND REPAIR OR REPLACE DAMAGED SYSTEMS IMMEDIATELY.

C. UNUSUALLY LOUD DEMOLITION WORK (i.e. CONCRETE REMOVAL) SHALL BE COORDINATED WITH THE PROPERTY MANAGER TO MINIMIZE DISRUPTION TO BUILDING OCCUPANTS.

D. ALL DOORS, FRAMES, HARDWARE, MECHANICAL ITEMS, PLUMBING FIXTURES, LIGHT FIXTURES (INCLUDING DOWN LIGHTS & FLUORESCENT), AND SPECIAL EQUIPMENT SHOWN TO BE REMOVED, SHALL BE CLEANED AND SAVED, REUSED, RETURNED TO BUILDING STOCK, OR DISPOSED OF AS DIRECTED BY OWNER'S PROJECT MANAGER.

E. REMOVAL OF ANY EQUIPMENT, CABLING SWITCHES, AND CONDUIT PERTAINING TO DATA/COMMUNICATIONS AND TELEPHONE SHALL BE VERIFIED WITH APPROPRIATE SERVICE COMPANY PRIOR TO PROCEEDING W/REMOVAL.

F. GENERAL CONTRACTOR TO COVER ALL SMOKE DETECTORS, FIRE HORNS/STROBES, RETURN AIR GRILLS, ETC. TO PREVENT DAMAGE FROM DUST AND APPLICATION OF NEW FINISHES. PROVIDE TEMPORARY EXHAUST DURING CONSTRUCTION OPERATIONS. TO THE GREATEST EXTENT POSSIBLE, ISOLATE AND/OR SHUT DOWN THE RETURN SIDE OF THE HVAC SYSTEM DURING CONSTRUCTION. WHEN VENTILATION SYSTEM MUST BE OPERATIONAL DURING CONSTRUCTION ACTIVITIES, PROVIDE TEMPORARY FILTERS.

G. IF ANY QUESTIONS ARISE AS TO THE REMOVAL OF ANY MATERIAL, CLARIFY THE POINT IN QUESTION WITH THE OWNER'S PROJECT MANAGER AND PROPERTY MANAGER BEFORE PROCEEDING.

H. REMOVE ALL POWER/VOICE/DATA DEVICES NOT SHOWN AS BEING REUSED. REMOVE PLATE, DEVICE, BOX, AND CABLING BACK TO THE SOURCE. PATCH AND REPAIR WALL AND PREP FOR NEW FINISH.

I. CAREFULLY REMOVE THROUGHOUT AREA OF WORK ALL LAYERS OF WALL COVERING & PANELS, U.N.O. PATCH AND REPAIR WALLS THROUGHOUT AREA OF WORK AS REQUIRED TO RECEIVE NEW FINISHES.

J. ALL LAYERS OF FLOOR FINISH TO REMAIN THROUGHOUT AREA OF WORK U.N.O.. PROTECT FROM DEMOLITION.

K. ALL ACOUSTICAL CEILING GRID & TILES AND ALL GYP. BD. CEILING, SOFFITS AND FASCIAS TO REMAIN, U.N.O..

L. AT MASONRY CONSTRUCTION SUCH AS COLUMNS, PIERS, AND CORE PARTITIONS DISTURBED DUE TO ADJACENT DEMOLITION, REPAIR OR REPLACE WITH MATERIALS TO MATCH EXISTING CONSTRUCTION.

M. EXISTING WINDOW TREATMENTS TO REMAIN. PROTECT FROM DAMAGE DURING DEMOLITION/CONSTRUCTION.

N. REMOVE EXISTING APPLIANCES AND EQUIPMENT, STORE FOR REUSE. COORDINATE WITH PROPERTY FACILITY MANAGER FOR STORAGE LOCATION.

O. AT AREAS OF PLUMBING REMOVAL, CAP ALL UNUSED PLUMBING LINES.

KEYNOTES - DEMOLITION

NO.	DESCRIPTION
1	STORAGE UNITS TO REMAIN.
2	REMOVE EQUIPMENT, CASES, COUNTERS AND ALL ASSOCIATED POWER, VOICE/DATA AND PLUMBING, UNLESS WHERE POSSIBLE TO BE REUSED FOR NEW LAYOUT.
3	REMOVE EXISTING SINK AND ASSOCIATED PLUMBING. AT FLOOR LOCATIONS CAP FLUSH AND PREP FOR SCHEDULED FLOORING.
4	REMOVE AND SALVAGE (3) PENDANT LIGHT FIXTURES AND STORE AT OWNER'S DIRECTION.
5	SINKS TO REMAIN.
6	ALL FINISHES TO REMAIN THIS ROOM.
7	FLOOR FINISH TO REMAIN WHERE ABLE. REMOVE WALL TILE AND PREP FOR NEW WALL TILE.

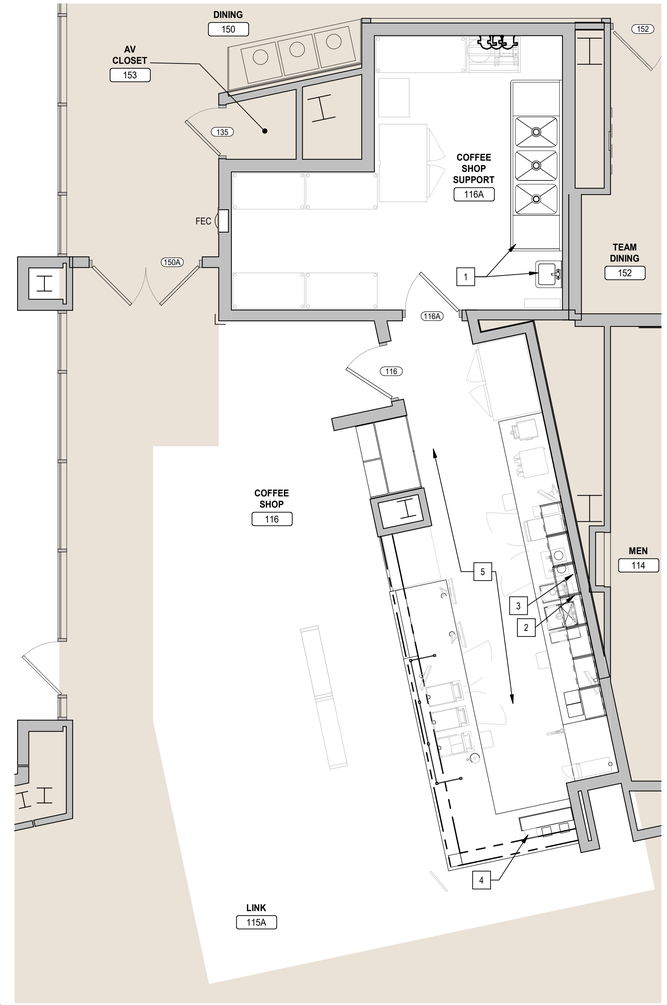

2 FLOOR 1 FLOOR PLAN

1/4" = 1'-0"

GENERAL NOTES - FLOOR PLAN

A. ALL DIMENSIONS SHOWN ARE TO FINISHED FACE OF WALL. (U.N.O.). ALIGN WALLS WITH ADJACENT SURFACES IF IT APPEARS TO ALIGN. LOCATIONS THAT ARE UNCLEAR WILL BE KEY NOTED

B. ALL CLEAR DIMENSIONS ARE TO BE EXACT WITHIN 1/8"; ALONG FULL HEIGHT AND FULL WIDTH OF WALLS. GENERAL CONTRACTOR SHALL NOT ADJUST ANY DIMENSIONS MARKED "CLEAR" OR "CLR" WITHOUT WRITTEN INSTRUCTION FROM THE ARCHITECT OF RECORD.

C. VERIFY INTEGRITY OF EXISTING FIRE-RATED PARTITIONS TO REMAIN AND REPORT FINDINGS TO THE OWNER'S PROJECT MANAGER.

D. PROVIDE FIRE-RETARDANT WOOD BLOCKING IN WALLS FOR CASEWORK. REFER TO CONSTRUCTION PLAN AND CASEWORK SECTION FOR LOCATIONS.

E. GENERAL CONTRACTOR RESPONSIBLE FOR MAINTAINING INTEGRITY OF EXISTING FIRE-PROOFING. PATCH ALL DAMAGE AS NEEDED. IF UNCERTAIN AS TO REQUIREMENTS, CONTACT ARCHITECT OF RECORD.

F. GENERAL CONTRACTOR TO VERIFY THAT EXISTING CONDITIONS REFLECT DIMENSIONS INDICATED IN CONSTRUCTION DOCUMENTS. RELAY ALL DISCREPANCIES TO ARCHITECT OF RECORD AS AN RFI.

G. SITE HAS NOT BEEN FIELD VERIFIED. PLEASE NOTIFY ARCHITECT OF RECORD IF DIMENSIONS/EXISTING CONDITIONS DIFFER FROM WHAT IS REFLECTED IN CONSTRUCTION DRAWINGS.

KEYNOTES - ARCHITECTURAL

NO.	DESCRIPTION
1	SINKS AND ASSOCIATED PLUMBING TO REMAIN.
2	OWNER'S FACILITY MANAGER TO PROVIDE SOAP DISPENSER. COORDINATE FINAL LOCATION WITH MILLWORK LAYOUT AND GENERAL CONTRACTOR.
3	PROVIDE WALL MOUNTED PAPER TOWEL DISPENSER (PTD-1). SEE SPECIFICATIONS SECTION 10 80 00. COORDINATE FINAL LOCATION WITH MILLWORK LAYOUT.
4	OWNER'S FACILITY MANAGER TO PROVIDE NAPKIN DISPENSER.
5	CASEWORK AND EQUIPMENT PROVIDED BY OWNER'S KITCHEN EQUIPMENT VENDORS.

RSP

1220 Marshall St NE
Minneapolis, MN
55413-1036

612.677.7100
rsparch.com

Project Contact:
BENNET JOHNSON
(612) 677-7253

CONSULTANTS

CERTIFICATION

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Architect under the laws of the state of Minnesota.

Name	DAVID C. NORBACK
License No.	11902
Expiration Date	6/30/2024
Date Signed	FEBRUARY 26, 2024

PROJECT FOR

UNITEDHEALTH GROUP®

9700 Healthcare Lane,
Minnetonka, MN
55343

UHG Project #	K1110358
Location Code	MN017
Business Unit	UHC CORPORATE
Project No.	61381110358
Drawn By	MJoC
Checked By	BAJ
Date	26 FEBRUARY 2024

NOTICE: The designs shown and described herein including all technical drawings, graphics, and models thereof, are proprietary and cannot be copied, duplicated or commercially exploited, in whole or in part, without express written permission of RSP Architects. These are available for limited review and evaluation by clients, consultants, contractors, government agencies, vendors and office personnel only in accordance with this Notice.

© Copyright RSP Architects 2024. All rights reserved.

ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

FLOOR 1 DEMOLITION AND ARCHITECTURAL FLOOR PLANS

A101