Project Management Initials:
Designer: Designer Checked: Checker Approved: Approver/RCH E1 30"x42"

Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

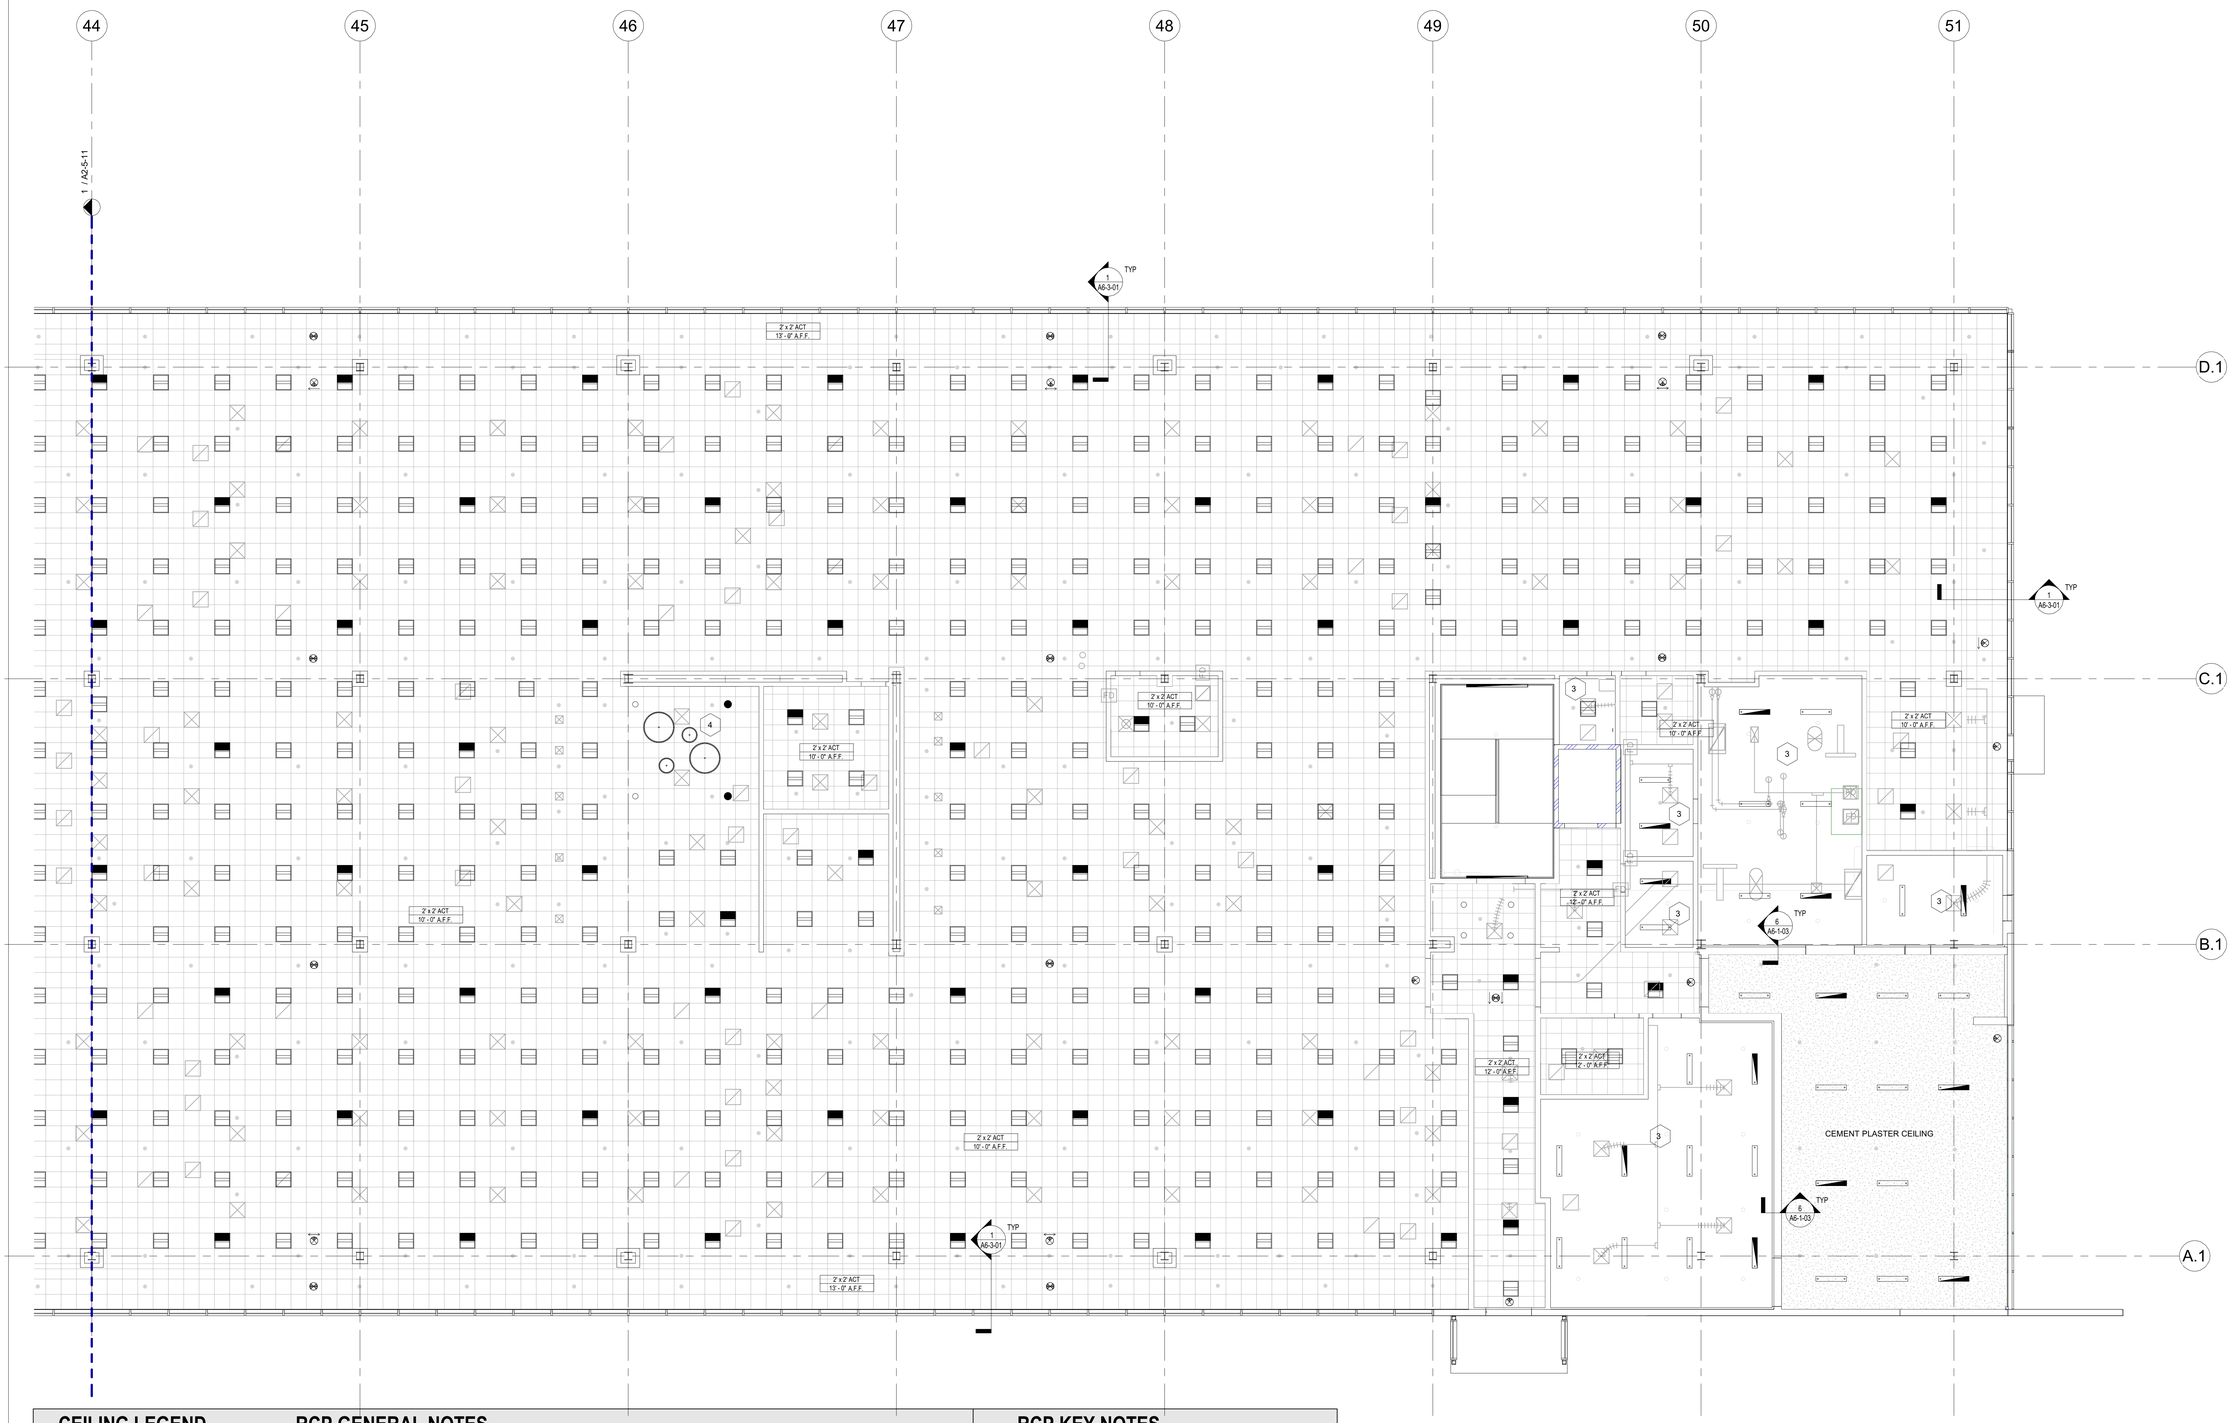

CEILING LEGEND

2 X 2 ACT

GYP BD

RCP GENERAL NOTES

1. THE CONTRACTOR SHALL COMPARE THIS REFLECTED CEILING PLAN WITH ELECTRICAL LIGHTING PLANS, MECHANICAL SUPPLY, RETURN, AND EXHAUST PLANS. THE CONTRACTOR SHALL REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.
2. SEE ELECTRICAL DRAWINGS FOR THE LOCATIONS OF CEILING MOUNTED SMOKE DETECTORS, SPEAKERS, EXIT SIGNAGE, FIRE ALARM DEVICES, WALL MOUNTED EXIT LIGHTS, ETC.
3. FOR FURTHER DIMENSIONS, SEE LARGE SCALE PLANS, SECTIONS, ELEVATIONS, AND DETAILS.
4. COORDINATE GYPSUM BOARD FURR DOWN HEIGHTS WITH FULL HEIGHT CABINETS AND INTERIOR ELEVATIONS
5. THE CONTRACTOR SHALL VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN NON-ACCESSIBLE TYPE CEILINGS WHERE SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING, OR ELECTRICAL ITEMS MAY BE REQUIRED. ACCESS PANELS SHALL BE THE FIRE RATED TYPE EQUAL TO THE RATING OF THE CEILING IN WHICH THEY OCCUR. COORDINATE LOCATION WITH ARCHITECT BEFORE INSTALLATION.
6. REFER TO PARTITION TYPES FOR PARTITIONS PENETRATING CEILING.
7. LOCATE ALL CEILING MOUNTED ELECTRICAL FIXTURES AND DEVICES IN THE CENTER OF CEILING PANELS, UNO.
8. ALL DEVICES SHALL NOT OCCUR ON ANY ACCENT GYPSUM BOARD CEILING ELEMENTS OR ACCENT WALLS, UNO. DEVICES SHOULD NOT OCCUR ON ANY DISTINCT DESIGN FEATURE WALLS.
9. ALL CEILING GRIDS TO BE CENTERED IN ROOM, UNO.
10. WHERE MECHANICAL DUCT WORK IS INTERSECTING SOFFIT, GC TO ENSURE THAT GYP. EDGE IS FINISHED (CAULKED/SEALED) IN A CLEAN FASHION.
11. REFER TO A6-3-01 FOR CEILING DETAILS.
12. CEILING GRID TO INCLUDE SUPPORT FOR LIGHT FIXTURES

RCP KEY NOTES

1. BOTTOM OF FIXTURE MOUNTED @ 8'-0" AFF, TYP.
2. BOTTOM OF FIXTURE MOUNTED @ 10'-0" AFF, TYP.
3. OPEN TO STRUCTURE
4. BOTTOM OF 48" FIXTURE MOUNTED @ 8'-0" AFF; BOTTOM OF 24" FIXTURE MOUNTED @ 7'-6" AFF
5. BOTTOM OF FIXTURE MOUNTED @ 12'-0" AFF, TYP.
6. BOTTOM OF FIXTURE MOUNTED AT SAME HEIGHT AS ADJACENT FIXTURE OVER LANDING @ 8'-0" AFF, TYP.
7. PAINT BOTTOM & SIDE OF GWB SOFFIT P-2, TYP.

1 **PARTIAL RCP -LEVEL 1 AREA B**
Scale: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0" 0 2' 4' 8' 16' 24'

N TN

Last Plotted: 8/26/2019 4:00:38 PM
Filename: BM:\60601397\Publix HQ\60601397_Publix HQ_ARCH_R2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

STATE OF FLORIDA
STEPHEN PANZARINO
AR92622
REGISTERED ARCHITECT

STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

Panzarino, Stephen
Digitally signed by Panzarino, Stephen
DN: CN=Panzarino, Stephen, OU=USTPA1, OU=US, OU=AMER, OU=AECOM/Users, DC=na, DC=aecomnet, DC=com
Date: 2019.08.26 16:59:14-04'00'

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G1-16.005 F.A.C.

KEY PLAN

EXISTING	A	B

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

PARTIAL RCP - LEVEL 1 AREA B

SHEET NUMBER

A2-5-12

©2016 AECOM Corporation