Project Management Initials:
Designer: Designer Checker: Checker Approved: Approver ARCH E1 30"x42"

Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

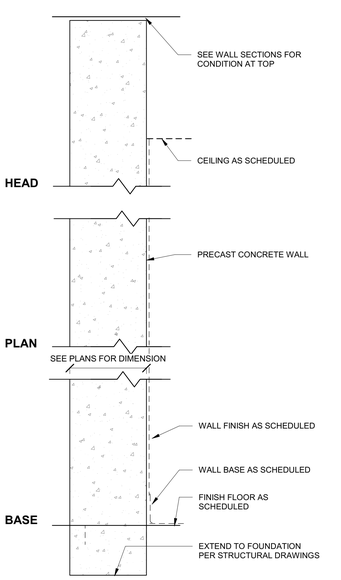

WALL GROUP P01			
Type Mark	Insulation Type	STC Rating	Fire Rating
P01A0	NA	NA	NA

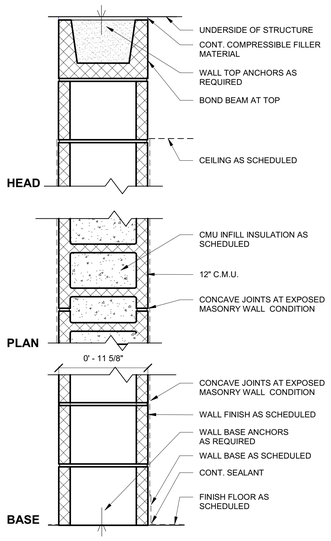

WALL GROUP M02			
Type Mark	Insulation Type	STC Rating	Fire Rating
M02A0	NA	NA	NA

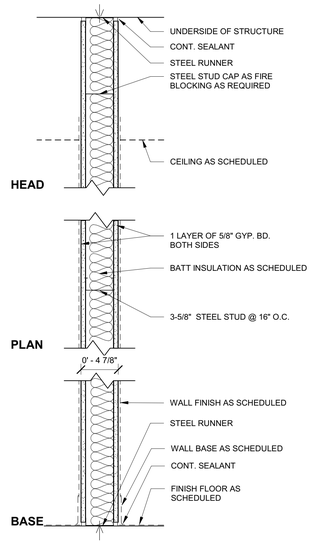

WALL GROUP S11			
Type Mark	Insulation Type	STC Rating	Fire Rating
S11B0	BATT INSULATION	NA	NA

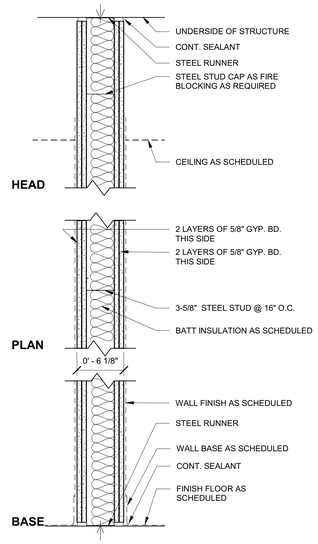

WALL GROUP S13			
Type Mark	Insulation Type	STC Rating	Fire Rating

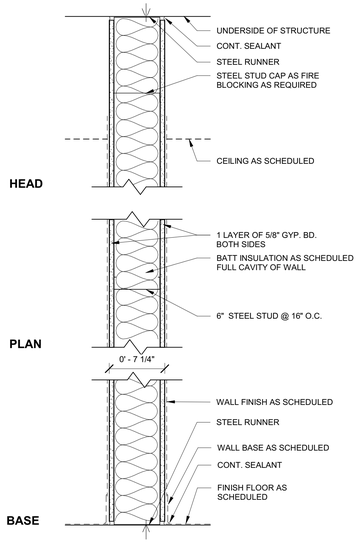

WALL GROUP S14			
Type Mark	Insulation Type	STC Rating	Fire Rating
S14A0	NA	NA	NA
S14A1	NA	NA	1 HR / PER UL DESIGN U465
S14B0	BATT INSULATION	NA	NA
S14B1	BATT INSULATION	NA	1 HR / PER UL DESIGN U465

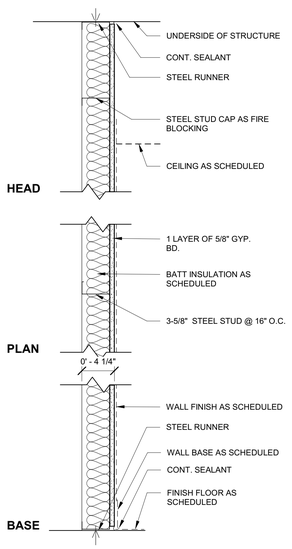

WALL GROUP S15			
Type Mark	Insulation Type	STC Rating	Fire Rating
S15B0	BATT INSULATION	NA	NA

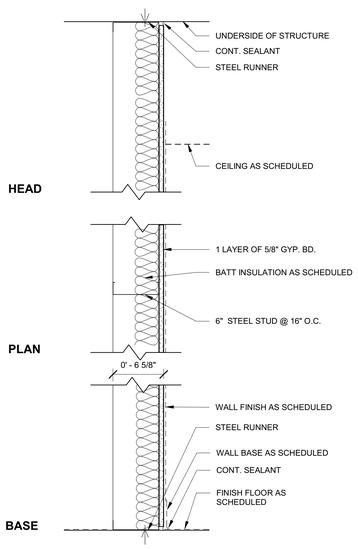

WALL GROUP S17			
Type Mark	Insulation Type	STC Rating	Fire Rating
S17A0	NA	NA	NA
S17B0	BATT INSULATION	NA	NA

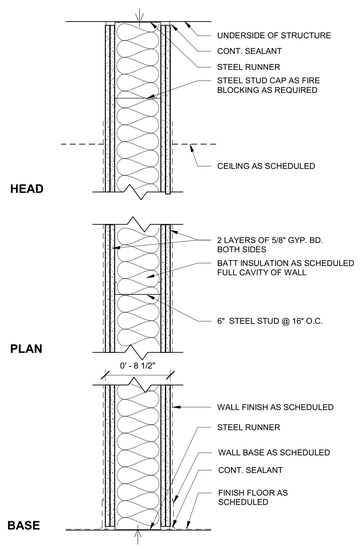

WALL GROUP S18			
Type Mark	Insulation Type	STC Rating	Fire Rating
S18A2	NA	NA	2 HR / PER UL DESIGN U419
S18B2	BATT INSULATION	NA	2 HR / PER UL DESIGN U419

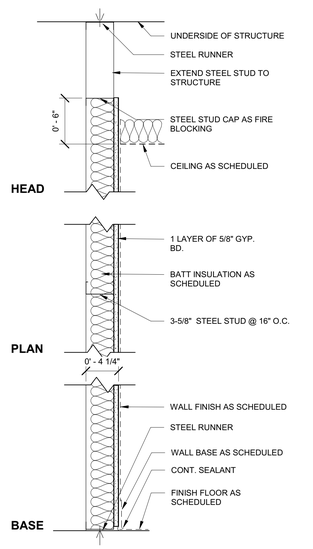

WALL GROUP S31			
Type Mark	Insulation Type	STC Rating	Fire Rating
S31A0	NA	NA	NA

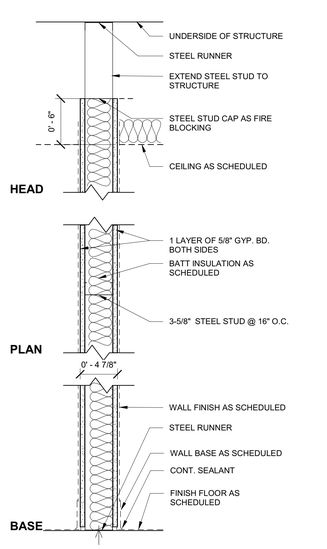

WALL GROUP S32			
Type Mark	Insulation Type	STC Rating	Fire Rating
S32A0	NA	NA	NA
S32B0	NA	NA	NA
S32C0	NA	STC	NA

WALL ASSEMBLY GENERAL NOTES

A1. NOT ALL PARTITION GROUPS OR TYPES WITHIN GROUPS HAVE BEEN UTILIZED RESULTING TYPE NUMBERS MAY NOT BE SEQUENTIAL

A2. PARTITION TYPE REFERENCES DO NOT ICNLUDE THE APPLIED FINISHES INDICATED BY THE ROOM FINISH REFERENCE AND ROOM FINISH SCHEDULE

B1. WALL AND STUD PARTITIONS SHALL BE FIREBLOCKED AT FLOORS, CEILINGS AND ROOFS, AT CONCEALED SPACES OF STUD PARTITIONS, AND AT FURRED SPACES AT CEILINGS AND FLOOR LEVELS, WITH THE EXCEPTION OF SUSPENDED CEILING SYSTEMS.

B2. PROVIDE ADDITIONAL BRACING AS REQUIRED AT ALL WALL STUD INSTALLATIONS EXCEEDING STUD MANUFACTURER REQUIREMENTS FOR MAXIMUM ALLOWED HEIGHT AND DEFLECTION

B3. PROVIDE A MINIMUM OF TWO-STUD SEPARATION BETWEEN OUTLET BOXES AND OTHER PENETRATIONS OCCURRING AT OPPOSITE SIDES OF WALLS.

B4. PROVIDE WALL REINFORCEMENT BETWEEN STUDS WHERE REQUIRED BY INSTALLATION OF MILLWORK AND/OR WALL HUNG EQUIPMENT.

B5. PROVIDE 18 GAUGE OR HEAVIER METAL STUDS AT ALL OUTSIDE CORNERS OF WALLS.

B6. PROVIDE BACKING OR REINFORCEMENT AS REQUIRED FOR INSTALLATION OF TOILET ACCESSORIES, TOILET PARTITIONS, DOOR STOPS, DOOR BUMPERS, WALL RAILS, GRAB BARS, ETC.

C1. PROVIDE FIRE RATED GYPSUM BOARD AT ALL WALLS AND PARTITIONS INDICATED TO BE FIRE RATED

C2. PROVIDE CONTINUOUS FIRE RATED SEALANT AT THE PERIMETER OF ALL FIRE RATED WALLS AND CHASES, INCLUDING THE TOP, BOTTOM AND SIDE EDGES ON BOTH SIDES OF WALL.

C3. PROVIDE CONTINUOUS NON-HARDENING ACOUSTICAL SEALANT AT TOP, SIDES AND EDGES OF BOTH SIDES OF WALL AT ALL NON-RATED GYPSUM BOARD PARTITIONS SCHEDULED TO RECEIVE SOUND ATTENUATION BLANKETS.

C4. WHERE CERAMIC TILE, PORCELAIN PAVERS, QUARRY TILE, TERRAZZO, OR CEMENT ARE INDICATED TO BE APPLIED TO PARTITIONS AS A BASE OR WALL FINISH SURFACE, REPLACE THE GWB ON THE PARTITION TO BE SO FINISHED, WITH 5/8" THICK GLASS MESH MORTAR UNITS WHICH HAVE BEEN TESTED AND CERTIFIED TO BE EQUIVALENT IN FIRE RATING TO THE GWB WHICH THEY REPLACE. THE SCHEDULED FIRE RATINGS OF ANY PARTITION SHALL NOT BE VIOLATED BY THE APPLICATION OF ANY FINISHES.

C5. ALL PENETRATIONS AT WALLS SHALL BE SLEEVED AND PACKED AIR TIGHT WITH SAFING INSULATION AND SEALANT.

C6. ALL JOINTS OF GYPSUM BOARD PANELS SHALL BE STAGGERED TAPED AND SEALED.

C7. GAP BETWEEN BOTTOM OF GYPSUM WALL BOARD AND FLOOR IN ALL GYPSUM BOARD PARTITIONS NOT TO EXCEED 1/4"

C8. LABEL ALL FIRE RATED AND SMOKE STOP PARTITIONS ABOVE CEILING WITH PLAQUE OR STENCILED SIGN READING: "FIRE AND SMOKE BARRIER: SEAL AND PROTECT ALL OPENINGS". SIGN SHALL BE PLACED ON BOTH SIDES OF WALLS AT 6' ON CENTER MAXIMUM, WITH AT LEAST ONE SIGN PER ROOM.

WALL DESIGNATION LEGEND

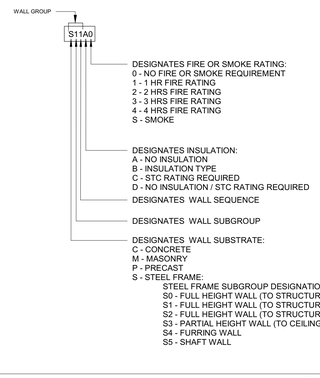

The drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

STATE OF FLORIDA
STEPHEN PANZARINO
AR92622
REGISTERED ARCHITECT

STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

Panzarino, Stephen
Digitally signed by Panzarino, Stephen
DN: CN=Panzarino, Stephen, OU=USTPA1, OU=US, OU=AMER, OU=AECOMUsers, DC=na, DC=aecomnet, DC=com
Date: 2019.08.26 17:29:04-04'00'

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G1-16.005 F.A.C.

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

WALL ASSEMBLY TYPES

SHEET NUMBER

A7-2-01

©2016 AECOM Corporation

Printed on ____% Post-Consumer Recycled Content Paper

Last Plotted: 8/26/2019 4:05:58 PM
Filename: BIM 360/60601397-Publix HQ/60601397_Publix HQ_ARCH_R2019.rvt