DOOR SCHEDULE

DOOR MARK NO.	FROM ROOM	TO ROOM	DOOR WIDTH	DOOR HEIGHT	DOOR THICKNESS	DOOR TYPE	DOOR MATERIAL	DOOR FINISH	GLASS TYPE	FIRE LABEL	HARDWARE GROUP	FRAME TYPE	FRAME MAT'L	FRAME FIN.	HEAD	JAMB	THRESHOLD	CARD READER	REMARKS
LEVEL 1																			
1-121A	EXTERIOR	VEST	6' - 0"	7' - 11"	2"	D	AL/GL				03		AL				7/A6-1-04		
1-121B	LOBBY	VEST	6' - 0"	7' - 11"	2"	D	AL/GL				03A		AL						
1-123A	QUIET ROOM	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-124A	EXTERIOR	VEST	6' - 0"	7' - 11"	2"	D	AL/GL				03		AL				7/A6-1-04		
1-124B	OPEN OFFICE	VEST	5' - 4"	8' - 0"	1 3/4"	E	WD			1 1/2 HR			HM		3/A6-2-01	4,7/A6-2-01			HOLD OPEN / WIDTH LEAF 1 = 1' - 10" / WIDTH LEAF 2 = 3' - 6"
2 1-124C	CORRIDOR	VEST	5' - 4"	8' - 0"	1 3/4"	E	WD			1 1/2 HR			HM		3/A6-2-01	4,7/A6-2-01			HOLD OPEN / WIDTH LEAF 1 = 1' - 10" / WIDTH LEAF 2 = 3' - 6"
1-127A	STAIR 6	VEST	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	26		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
1-127B	STAIR 6	COMMUNICATIONS CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
1-130A	COMMUNICATIONS CORRIDOR	J.C.	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-131A	SUPPLY	COMMUNICATIONS CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-132A	COMMUNICATIONS CORRIDOR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
1-132B	MEN'S RR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
1-133A	COMMUNICATIONS CORRIDOR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
1-133B	WOMEN'S RR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
1-134A	OPEN OFFICE	MECHANICAL	6' - 0"	8' - 0"	1 3/4"	B	HM				09		HM		1/A6-2-01	2/A6-2-01			
1-135A	OPEN OFFICE	IDF	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-136A	ELEC	MECHANICAL	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
1-138A	CORRIDOR	LARGE CONF	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-139A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-140A	SMALL CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-141A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-142A	SMALL CONF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-143A	OPEN OFFICE	MOTHERS RM	3' - 0"	7' - 0"	1 3/4"	A	WD				24		HM		1/A6-2-01	2/A6-2-01			
1-145A	MECHANICAL	ELEV CONTROL	3' - 6"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
1-150A	EXTERIOR	OPEN OFFICE	6' - 0"	7' - 11"	2"	D	AL/GL				03		AL				7/A6-1-04		
1-151A	TEAM ROOM	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
1-153A	IDF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-154A	EXTERIOR	OFFICE	3' - 0"	7' - 11"	1 3/4"	C	AL/GL				37		AL				7/A6-1-04		
1-155A	OPEN OFFICE	SUPPLY	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-156A	OPEN OFFICE	CUSTODIAL	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1-157A	STAIR 7	EXIT CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	11		HM		3/A6-2-01	4/A6-2-01			
1-158A	EXIT CORRIDOR	FREIGHT ELEV LOBBY	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	11		HM		3/A6-2-01	4/A6-2-01			
1-158B	EXIT CORRIDOR	OPEN OFFICE	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			
1-158C	EXTERIOR	EXIT CORRIDOR	6' - 0"	8' - 0"	2"	D	AL/GL				42		AL		5/A6-2-01	6/A6-2-01	7/A6-1-04		
1-160A	LOADING	FREIGHT ELEV LOBBY	6' - 0"	8' - 0"	1 3/4"	B1	WD				01		HM		5/A6-2-01	6/A6-2-01	7/A6-1-04		
1-161A	FREIGHT ELEV LOBBY	ELEV CONTROL	3' - 6"	7' - 0"	1 3/4"	A1	WD						HM		1/A6-2-01	2/A6-2-01			
1 1-161B	FREIGHT ELEV LOBBY	STORAGE	3' - 6"	7' - 0"	1 3/4"	A1	WD			1 HR	25		HM		3/A6-2-01	4/A6-2-01			
NEW DOOR 1-161C		STAIR 6	2' - 0"	3' - 0"	1 3/4"														
1-162A	MAIL	FREIGHT ELEV LOBBY	3' - 6"	1 7' - 0"	1 3/4"	A1	WD				10A		HM		1/A6-2-01	2/A6-2-01			
1-163A	STORAGE	FREIGHT ELEV LOBBY	3' - 6"	7' - 0"	1 3/4"	A1	HM				25		HM		1/A6-2-01	2/A6-2-01			
1-163B	LOADING	STORAGE	6' - 0"	8' - 0"	1 3/4"	B1	HM				42		HM		5/A6-2-01	6/A6-2-01			
NEW DOOR 1-163C	STORAGE		3' - 0"	7' - 0"	1 3/4"	A	HM						HM		1/A6-2-01	2/A6-2-01			PIPE CHASE ACCESS
1-165A	LOADING	MECHANICAL	6' - 0"	7' - 0"	1 3/4"	B	HM				21		HM		1/A6-2-01	2/A6-2-01			
1-166A	MECHANICAL	ELEC	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
1 1-167A	LOADING	MAIN ELEC RM	3' - 0"	7' - 0"	1 3/4"	A	HM				20		HM		5/A6-2-01	6/A6-2-01			
1-168A REMOVED 1-167B	EXTERIOR	MAIN ELEC RM	3' - 0"	7' - 0"	1 3/4"	A	HM				20		HM		5/A6-2-01	6/A6-2-01			
LEVEL 2																			
2-123A	QUIET ROOM	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-127A	STAIR 6	CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
2-127B	STAIR 6	COMMUNICATIONS CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
2-130A	COMMUNICATIONS CORRIDOR	J.C.	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-131A	SUPPLY	COMMUNICATIONS CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-132A	COMMUNICATIONS CORRIDOR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
2-132B	MEN'S RR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
2-133A	COMMUNICATIONS CORRIDOR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
2-133B	WOMEN'S RR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
2-134A	OPEN OFFICE	MECHANICAL	6' - 0"	8' - 0"	1 3/4"	B	HM				09		HM		1/A6-2-01	2/A6-2-01			
2-135A	IDF	OPEN OFFICE	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-136A	ELEC	MECHANICAL	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
2-138A	LARGE CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-139A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-140A	CORRIDOR	SMALL CONF	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-141A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-142A	SMALL CONF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-143A	OPEN OFFICE	MOTHER'S RM	3' - 0"	7' - 0"	1 3/4"	A	WD				24		HM		1/A6-2-01	2/A6-2-01			
2-151A	TEAM ROOM	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25A		HM		1/A6-2-01	2/A6-2-01			
2-153A	IDF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1 2-155A	OPEN OFFICE	SUPPLY	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-160A REMOVED 2-157A	OPEN OFFICE	STAIR 7	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	29		HM		3/A6-2-01	4/A6-2-01			
2-161A	STORAGE	FREIGHT ELEV LOBBY	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-163A	STORAGE	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
2-165A	OPEN OFFICE	MECHANICAL	6' - 0"	8' - 0"	1 3/4"	B	HM				09		HM		1/A6-2-01	2/A6-2-01			
2-166A	MECHANICAL	ELEC	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
LEVEL 3																			
3-123A	QUIET ROOM	OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-127A	STAIR 6	COMMUNICATIONS CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
3-127B	STAIR 6	CORRIDOR	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	40		HM		3/A6-2-01	4/A6-2-01			HOLD OPEN
3-130A	COMMUNICATIONS CORRIDOR	J.C.	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-131A	SUPPLY	COMMUNICATIONS CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-132A	COMMUNICATIONS CORRIDOR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
3-132B	MEN'S RR	MEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
3-133A	COMMUNICATIONS CORRIDOR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A1	WD				18		HM		1/A6-2-01	2/A6-2-01			
3-133B	WOMEN'S RR	WOMEN'S RR	3' - 0"	7' - 0"	1 3/4"	A	WD				18		HM		1/A6-2-01	2/A6-2-01			
3-134A	OFFICE	MECHANICAL	6' - 0"	8' - 0"	1 3/4"	B	HM				09		HM		1/A6-2-01	2/A6-2-01			
3-135A	IDF	OFFICE	3' - 6"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-136A	ELEC	MECHANICAL	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			
3-138A	LARGE CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-139A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-140A	CORRIDOR	SMALL CONF	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-141A	MED CONF	CORRIDOR	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-142A	SMALL CONF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-143A		MOTHER'S RM	3' - 0"	7' - 0"	1 3/4"	A	WD				24		HM		1/A6-2-01	2/A6-2-01			
3-151A	TEAM ROOM	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A1	WD				25A		HM		1/A6-2-01	2/A6-2-01			
3-153A	IDF	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
1 3-155A	OPEN OFFICE	SUPPLY	3' - 0"	7' - 0"	1 3/4"	A1	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-160A REMOVED 3-157A	OPEN OFFICE	STAIR 7	6' - 0"	8' - 0"	1 3/4"	B1	WD			1 1/2 HR	29		HM		3/A6-2-01	4/A6-2-01			
3-161A	STORAGE	FREIGHT ELEV LOBBY	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-163A	STORAGE	OPEN OFFICE	3' - 0"	7' - 0"	1 3/4"	A	WD				25		HM		1/A6-2-01	2/A6-2-01			
3-165A	OPEN OFFICE	MECHANICAL	6' - 0"	8' - 0"	1 3/4"	B	HM				09		HM		1/A6-2-01	2/A6-2-01			
3-166A	MECHANICAL	ELEC	3' - 0"	7' - 0"	1 3/4"	A	WD			1 HR	20		HM		3/A6-2-01	4/A6-2-01			

DOOR LEGEND / ABBREVIATIONS

DOOR TYPE:

(SEE SCHEDULE BLEOW)

DOOR MATERIAL:

WD WOOD
HM HOLLOW METAL
AL ALUMINUM

DOOR FINISH:

PT PAINT
ST STAINED
AL ALUMINUM

GLASS TYPE:

GL-1 CLEAR TEMPERED GLASS
GL-2 CLEAR TEMPERED GLASS
GL-3 FROSTED TEMPERED GLASS

FRAME TYPE:

(SEE ....)

FRAME MATERIAL:

HM HOLLOW METAL
AL ALUMINUM

FRAME FINISH:

PT PAINT

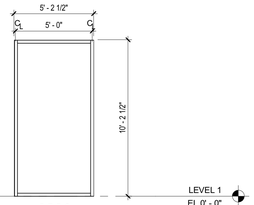

W1

SYSTEM TYPE: LAMINATED GLASS ON ALUMINUM STOREFRONT
FRAME: ALUMINUM
FRAME FINISH: CLEAR ANODIZED
GLAZING: IMPACT RESISTANT GLASS



W2

SYSTEM TYPE: ALUMINUM GLASS WINDOW
FRAME: ALUMINUM
FRAME FINISH: CLEAR ANODIZED
GLAZING: LAMINATED GLASS

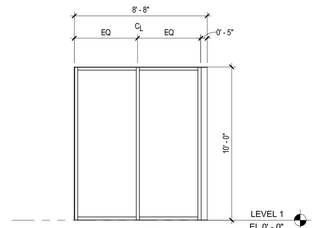

W3

SYSTEM TYPE: ALUMINUM GLASS WINDOW
FRAME: ALUMINUM
FRAME FINISH: CLEAR ANODIZED
GLAZING: LAMINATED GLASS

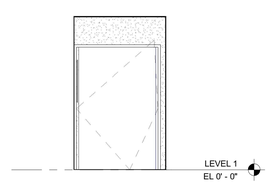

W4

SYSTEM TYPE: ALUMINUM GLASS WINDOW
FRAME: ALUMINUM
FRAME FINISH: CLEAR ANODIZED
GLAZING: TEMPERED CLEAR GLASS

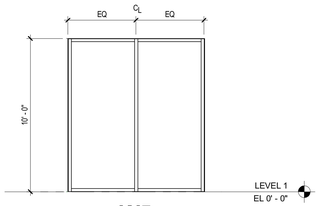

W5

SYSTEM TYPE: ALUMINUM GLASS WINDOW
FRAME: ALUMINUM
FRAME FINISH: CLEAR ANODIZED
GLAZING: TEMPERED CLEAR GLASS

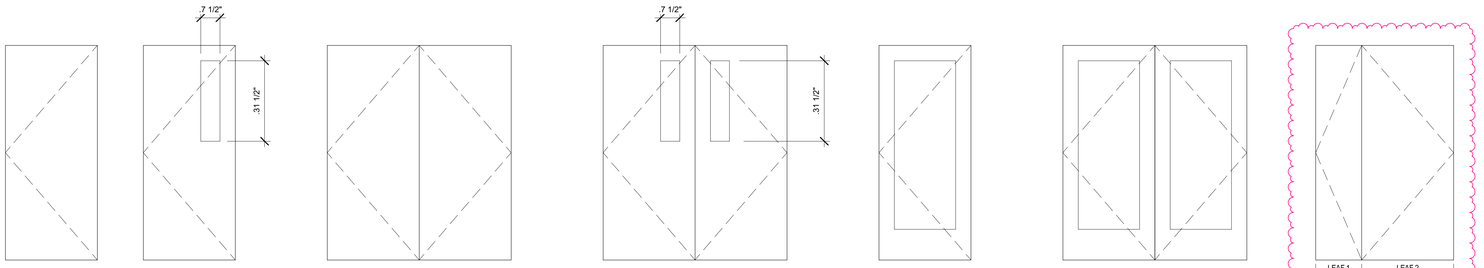

A A1 B B1 C D E

DOOR TYPES

WINDOW TYPES

Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

STATE OF FLORIDA
STEPHEN PANZARINO
AR92622
REGISTERED ARCHITECT

STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

Panzarino, Stephen
Digitally signed by Panzarino, Stephen
DN: CN="Panzarino, Stephen", OU=USTPA1, OU=US, OU=AMER, OU=AECOM\users, DC=na, DC=aecomnet, DC=com
Date: 2019.10.31 12:19:06-04'00'

ISSUE/REVISION

I/R	DATE	DESCRIPTION
2	OCT 28, 2019	PERMIT COMMENTS
1	SEP 30, 2019	100% CONSTRUCTION DOCUMENTS
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS
	MAY 31, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

DOOR SCHEDULE

SHEET NUMBER

A7-3-01

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever, to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G1-16.005 F.A.C.

©2016 AECOM Corporation

Project Management Initials:
Designer: Designer Checker: Checker Approved: Approver/ARCH E1 30"x42"

Last Plotted: 10/29/2019 5:06:05 PM
Filename: BM:360/60601397-Publix HQ/60601397_Publix HQ_ARCH_R2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper