Project Management Initials:
Designer: Designer Checked: Checker Approved: ApproverARCH E1 30"x42"

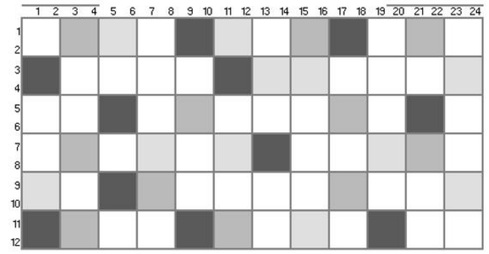

MARK: RANDOM BLEND

55%	GWT-1	
15%	GWT-2	
15%	GWT-3	
15%	GWT-4	

2 **MOSAIC TILE**
Scale: 3" = 1'-0"

TYPE	MATERIAL	MODEL	COLOR/FINISH	MFG.	LOCATION / REMARKS	NOTES
CT-1	CARPET TILE	MACROBLOOM	ICELAND MOSS	MOHAWK		
CT-2	CARPET TILE	MICROBLOOM	ICELAND MOSS	MOHAWK		
CT-3	CARPET TILE	GROUNDCOVER	ROCK FACE	MOHAWK		
CT-4	CARPET TILE	MICROBLOOM	FROSTED SHIELD	MOHAWK		
GWT-1	GLAZED CERAMIC TILE	SEMI GLOSS	WHITE	DALTILE	RESTROOMS - TOILET AND LAV WALLS	CUSTOM MOSAIC
GWT-2	GLAZED CERAMIC TILE	SEMI GLOSS	GO GREEN	DALTILE	RESTROOMS - TOILET AND LAV WALLS	CUSTOM MOSAIC
GWT-3	GLAZED CERAMIC TILE	SEMI GLOSS	CITRIC BLOOM	DALTILE	RESTROOMS - TOILET AND LAV WALLS	CUSTOM MOSAIC
GWT-4	GLAZED CERAMIC TILE	SEMI GLOSS	KEY LIME	DALTILE	RESTROOMS - TOILET AND LAV WALLS	CUSTOM MOSAIC
P-1	PAINT	7021	SIMPLE WHITE	SHERWIN WILLIAMS OR APPROVED EQUAL	ALL	
P-2	PAINT	6633	INVENTIVE ORANGE	SHERWIN WILLIAMS OR APPROVED EQUAL	STAIRS/CORE	LIGHT
P-3	PAINT	6634	COPPER HARBOR	SHERWIN WILLIAMS OR APPROVED EQUAL	STAIRS/CORE	DARK
P-4	PAINT	6220	INTERESTING AQUA	SHERWIN WILLIAMS OR APPROVED EQUAL	BRACING WALLS	DARK
P-5	PAINT	6219	RAIN	SHERWIN WILLIAMS OR APPROVED EQUAL	QUIET ROOM, MOTHER'S ROOM	LIGHT
P-6	PAINT	7022	ALPACA	SHERWIN WILLIAMS OR APPROVED EQUAL	BACK OF HOUSE	
P-7	PAINT	6178	CLARY SAGE	SHERWIN WILLIAMS OR APPROVED EQUAL	BACK OF HOUSE	
PL-1	PLASTIC LAMINATE	4830K-18	SATIN STAINLESS	WILSONART	TOILET PARTITION	
PL-2	PLASTIC LAMINATE	8208k-16	FAWN CYPRESS	WILSONART	BREAK ROOM CABINETS	
RB-1	RUBBER WALL BASE	TRADITIONAL WALL BASE	63 BURNT UMBER	JOHNSONITE	ALL	
RFT-1	RUBBER FLOOR TILE	RAISED ROUND	63 BURNT UMBER	JOHNSONITE	STAIR 7	
RSA-1	RUBBER STAIR ACCESSORY	ANGLE FIT RUBBER TREAD W/INTEGRATED RISER	63 BURNT UMBER	JOHNSONITE	STAIR 7. RAISED ROUND TEXTURE	
RTZ-1	RESINOUS TERRAZZO	MATCH EXISTING			STAIR	
SC-1	SEALED CONCRETE				MECH. ROOMS AND STORAGE	
SSM-1	SOLID SURFACE	9196RS	YUKON RIVERSTONE	WILSONART	BATHROOMS W/ LINEN WHITE SINK	
SSM-2	SOLID SURFACE	9208CS	WHITE STONE	WILSONART	BREAK ROOM	
SVT-1	SOLID VINYL FLOOR TILE	HOT&HEAVY	VERA	MOHAWK	BREAK ROOM, TRANSITION AREA	
SVT-2	ENHANCED RESILIENT	SAKIORI LINKED	859 MOLA	MOHAWK	ELEVATOR	
TW-1	TACKABLE WALL BOARD	WALL TALKERS	AZTEC C250-07	KOROSEAL	BREAK ROOM	
TW-2	TACKABLE WALL BOARD	WALL TALKERS	PEWTER C250-C2	KOROSEAL	OPEN COLLAB AREA	
UPT-1	PORCELAIN TILE	PORCEALATO	GRIGIO GRANITE	DALTILE	RESTROOM FLOOR	
UPTB-1	PORCELAIN TILE BASE	PORCEALATO	GRIGIO GRANITE	DALTILE	RESTROOM BASE	
VCT-1	VCT	EXCELON	SOFT WARM BEIGE	ARMSTRONG	BACK OF HOUSE 1ST FLOOR	
VWC-3	VINYL WALLCOVERING	CASCADE	YOUTH	MAHARAM	QUIET ROOM	
VWC-4	VINYL WALLCOVERING	GARNER	WASABI	MAHARAM	RESTROOMS	
VWC-5	VINYL WALLCOVERING	BARBICAN	GREEN	WOLF GORDON	MOTHER'S ROOM	
VWC-6	VINYL WALLCOVERING	CUSTOM			CUSTOM GRAPHIC PROVIDED BY PUBLIX	

1 **FINISH SCHEDULE**
Scale: N.T.S.



5 **FLOOR TRANSITION - VCT TO CARPET**
Scale: 1 1/2" = 1'-0"



4 **FLOOR TRANSITION - CONCRETE TO CARPET**
Scale: 1 1/2" = 1'-0"



3 **FLOOR TRANSITION - CARPET TO TILE**
Scale: 1 1/2" = 1'-0"

Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

STATE OF FLORIDA
STEPHEN PANZARINO
AR92622
REGISTERED ARCHITECT

STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY STEPHEN PANZARINO, REGISTERED ARCHITECT, STATE OF FLORIDA, LICENSE NO. AR92622 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES

Panzarino, Stephen
Digitally signed by Panzarino, Stephen
DN: CN=Panzarino, Stephen, OU=USTPA1, OU=US, OU=AMER, OU=AECOMUsers, DC=na, DC=aecomnet, DC=com
Date: 2019.08.26 17:30:58-04'00'

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G1-16.005 F.A.C.

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

FINISH SCHEDULE

SHEET NUMBER

A7-4-01

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

Last Plotted: 8/26/2019 4:09:21 PM
Filename: BIM 360:/60601397-Publix HQ/60601397_Publix HQ_ARCH_E2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper

©2016 AECOM Corporation