Building Inspection Division
Lakeland
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Date: 11/15/19
Permit Number: BLD19-06035

ROOT PRUNING/TREE BARRICADE NOTES

1. PRIOR TO ANY CONSTRUCTION ACTIVITIES, CONTRACTOR SHALL PROTECT TREES TO BE PRESERVED FROM DAMAGE BY PROVIDING TREE BARRICADES ERECTED PRIOR TO SITE CLEARING OR OTHER CONSTRUCTION ACTIVITIES, INCLUDING ROOT PRUNING. TREE BARRICADES SHALL BE INSPECTED BY OWNER AND PROJECT CERTIFIED ARBORIST. CONTRACTOR SHALL PROVIDE 72 HOURS ADVANCE NOTICE TO OWNER AND PROJECT CERTIFIED ARBORIST TO SCHEDULE AN INSPECTION OF BARRICADES AND ROOT PRUNING. DO NOT ROOT PRUNE OR INSTALL TREE BARRICADES BEYOND THE PROJECT LIMITS.
2. THE CONTRACTOR SHALL EMPLOY AN INTERNATIONAL SOCIETY OF ARBORICULTURE (ISA) CERTIFIED ARBORIST TO PERFORM OR SUPERVISE TREE PROTECTION, ROOT PRUNING, TREE TRIMMING, AND APPLICATION OF FERTILIZER AND FUNGICIDE. CERTIFIED ARBORIST SHALL HAVE A MINIMUM OF 5 YEARS EXPERIENCE ON SIMILAR PROJECTS. SUBMIT THE CERTIFIED ARBORIST'S CERTIFICATION AND PROJECT EXPERIENCE TO OWNER FOR APPROVAL PRIOR TO PERFORMING THE WORK.
3. CONTRACTOR TO INSTALL AND MAINTAIN SHREDDED MELALEUCA MULCH AT 3" WETTED DEPTH WITHIN ALL TREE BARRICADES THROUGHOUT THE DURATION OF PROJECT CONSTRUCTION. DO NOT PLACE MULCH AGAINST TREE OR PALM TRUNKS.
4. TREE BARRICADES WILL REMAIN THROUGHOUT THE DURATION OF PROJECT CONSTRUCTION. CONTRACTOR SHALL MONITOR THE CONDITION OF THE BARRICADES DAILY AND REPAIR ANY BREACHES IMMEDIATELY.
5. CONTRACTOR SHALL PROTECT THE ROOT SYSTEMS OF TREES TO BE PRESERVED. DO NOT STORE ANY CONSTRUCTION MATERIALS, FILL, DEBRIS, EXCAVATED MATERIALS AND CHEMICALS WITHIN THE TREE BARRICADE AREAS. DO NOT PARK OR OPERATE MACHINERY OR EQUIPMENT WITHIN BARRICADES.
6. TEMPORARY ACCESS WITHIN TREE BARRICADES SHALL BE PERMITTED FOR THE REMOVAL OF EXISTING PLANT MATERIAL AND THE INSTALLATION OF PROPOSED PLANT MATERIAL WHERE INDICATED ON THE LANDSCAPE PLANS. HAND REMOVE EXISTING PLANT MATERIAL IN LOCATIONS WHERE PROPOSED SHRUB AND GROUNDCOVER ARE TO BE INSTALLED BENEATH EXISTING, PROTECTED TREES. DO NOT USE MACHINERY OR HEAVY EQUIPMENT TO CLEAR AND GRUB OR INSTALL PROPOSED SHRUBS AND GROUNDCOVER BENEATH EXISTING TREES. IMMEDIATELY RESTORE TREE BARRICADES UPON COMPLETION OF WORK.
7. ALL TREE TRIMMING, ROOT PRUNING, FERTILIZER AND FUNGICIDE APPLICATIONS SHALL BE PERFORMED BY AN ISA CERTIFIED ARBORIST AND STATE LICENSED OPERATOR IN ACCORDANCE WITH FLORIDA STATUTES AND ANSI A300, LATEST EDITIONS.
8. CONTRACTOR SHALL LOCATE AND MARK ROOT-PRUNING LOCATIONS FOR APPROVAL BY THE OWNER AND ISA CERTIFIED ARBORIST PRIOR TO TRENCHING. CONTRACTOR SHALL ROOT PRUNE TREES TO BE PRESERVED AS LOCATED ON THE PLANS. ROOT PRUNING SHALL OCCUR IN A TRENCH 12 INCHES IN WIDTH MINIMUM AND 24 INCHES IN DEPTH. CONTRACTOR SHALL HAND PRUNE ANY ROOTS OVER 1 INCH IN DIAMETER ENCOUNTERED DURING SITE GRADING DEEPER THAN 14 INCHES TO THE LIMIT OF CUT. ALL ROOT PRUNING EQUIPMENT SHALL BE STERILIZED PRIOR TO USE. NO ROOT PRUNING SHALL OCCUR OUTSIDE OF PROJECT LIMITS.
9. A VERMEER ROOT-PRUNING MACHINE (OR APPROVED EQUAL) SHALL BE USED TO CUT THROUGH THE ROOTS. ALL ROOTS SHALL BE CUT CLEANLY WITH NO FRAYED OR JAGGED CUTS ALLOWED. DO NOT USE AN EXCAVATOR.
10. FOLLOWING COMPLETION OF ROOT PRUNING, CONTRACTOR SHALL BACKFILL THE TRENCH WITH NATIVE SOILS. BACKFILLING SHALL OCCUR AT THE END OF EACH DAY. DO NOT LEAVE ROOTS EXPOSED FOR MORE THAN 8 HOURS. A SOIL DRENCH FUNGICIDE SHALL BE APPLIED AT THE MANUFACTURER'S RECOMMENDED RATE TO THE TRENCH AREAS WITHIN FIVE DAYS FOLLOWING COMPLETION OF ROOT PRUNING OR AS DIRECTED BY ISA CERTIFIED ARBORIST.
11. SOIL MOISTURE
    A. VOLUMETRIC SOIL MOISTURE LEVEL, IN ALL SOILS WITHIN THE TREE BARRICADE AREA SHALL BE MAINTAINED ABOVE PERMANENT WILT POINT TO A DEPTH OF AT LEAST 8 INCHES. NO SOIL WORK OR OTHER ACTIVITY SHALL BE PERMITTED WITHIN THE TREE AND PLANT PROTECTION AREA WHEN THE VOLUMETRIC SOIL MOISTURE IS ABOVE FIELD CAPACITY. THE PERMANENT WILT POINT AND FIELD CAPACITY FOR EACH TYPE OF SOIL TEXTURE SHALL BE DEFINED AS FOLLOWS (NUMBERS INDICATE PERCENTAGE VOLUMETRIC SOIL MOISTURE).

SOIL TYPE	PERMANENT WILT POINT V / V	FIELD CAPACITY V / V
SAND, LOAMY SAND, SANDY LOAM	5-8%	12-18%
LOAM, SANDY CLAY, SANDY CLAY LOAM	14-25%	27-36%
CLAY LOAM, SILT LOAM	11-22%	31-36%
SILTY CLAY, SILTY CLAY LOAM	22-27%	38-41%

VOLUMETRIC SOIL MOISTURE SHALL BE MEASURED WITH A DIGITAL, ELECTRIC CONDUCTIVITY METER. THE METER SHALL BE THE DIGITAL SOIL MOISTURE METER, DSMM500 BY GENERAL SPECIALTY TOOLS AND INSTRUMENTS, OR APPROVED EQUIVALENT METER.

B. THE CONTRACTOR SHALL CONFIRM THE SOIL MOISTURE LEVELS WITH A MOISTURE METER. IF THE MOISTURE IS TOO HIGH, SUSPEND OPERATIONS UNTIL THE SOIL MOISTURE DRAINS TO BELOW FIELD CAPACITY.

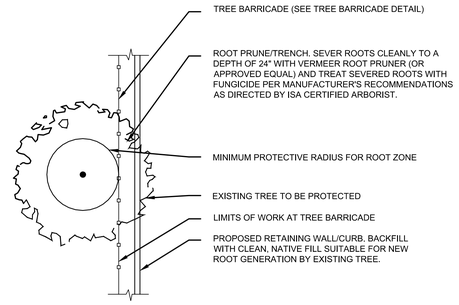

PLAN

NOTE:

1. DURING LAND ALTERATION AND CONSTRUCTION ACTIVITIES, THE CONTRACTOR SHALL NOT REMOVE VEGETATION BY GRUBBING OR PLACE SOIL DEPOSITS, DEBRIS, SOLVENTS, CONSTRUCTION MATERIAL, MACHINERY OR OTHER EQUIPMENT OF ANY KIND WITHIN THE DRIPLINE OF A TREE THAT IS TO REMAIN ON THE SITE. TREE BARRICADES SHALL BE CONSTRUCTED AROUND ALL EXISTING TREES TO REMAIN PRIOR TO COMMENCEMENT OF CONSTRUCTION. TREE BARRICADES SHALL REMAIN IN PLACE UNTIL LAND ALTERATION AND CONSTRUCTION ACTIVITIES ARE COMPLETED. IN AREAS WHERE SPACE LIMITATIONS DO NOT PERMIT BARRICADE CONSTRUCTION PER DETAIL, CONTRACTOR SHALL SUBMIT SHOP DRAWINGS TO THE OWNER FOR APPROVAL PRIOR TO CONSTRUCTION.

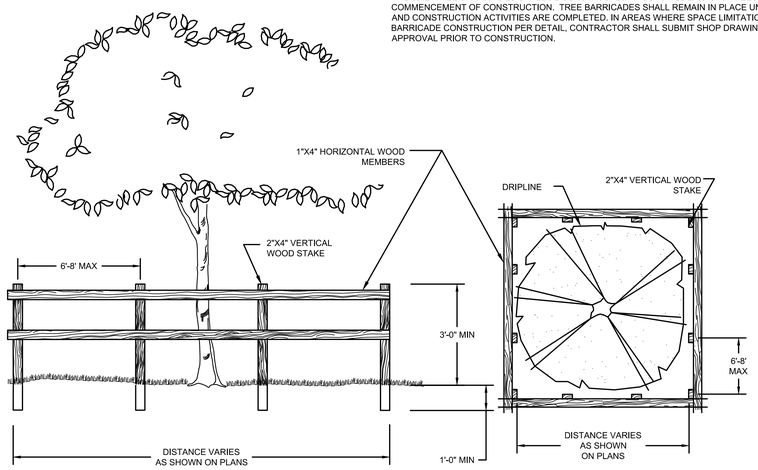

ELEVATION PLAN

TREE BARRICADE
N.T.S.

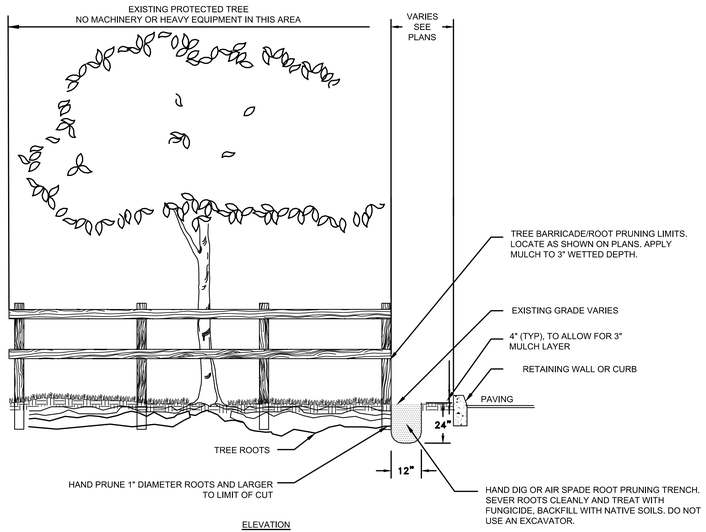

ELEVATION

ROOT PRUNING DETAIL
N.T.S.

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

Digitally signed by Dennis W Syrja
Date: 2019.08.23 10:45:56 -04'00'

REGISTRATION

DENNIS W. SYRJA
LICENSE
No. 43423
STATE OF FLORIDA
PROFESSIONAL ENGINEER

DENNIS W. SYRJA, P.E.
ENGINEER OF RECORD

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DENNIS W. SYRJA, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

TREE PROTECTION/ ROOT PRUNING NOTES AND DETAILS

SHEET NUMBER

CG-542

Printed on ___% Post-Consumer Recycled Content Paper
©2016 AECOM Corporation