Building Inspection Division
Lakeland
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Date: 11/15/19
Permit Number: BLD19-06035



STT1 & STT2:
MAINTENANCE OVERRIDE SWITCH, PUSHBUTTON TIMER SWITCH (WATTSTOPPER TS-400 OR EQUAL),LOCATED INSIDE CONTACTOR CABINET.

P:
120V PHOTOCELL, TORK OR INTERMATIC. MOUNT ON 3/4" RGS 6" ABOVE ROOF. AIM NORTH.

TC:
ASTRONOMICAL, 120V TIMECLOCK. TORK OR INTERMATIC.

C1 & C2:
30 AMP FULLY RATED 6-POLE NORMALLY OPEN ELECTRICALLY HELD LIGHTING CONTACTOR WITH 120 VOLT HOLDING COIL. SQUARE-D TYPE 8903

GENERAL NOTES:
1. CONTACTOR C1 LIGHT CONTROL SHALL BE PHOTOCELL "ON", TIMECLOCK "OFF".
2. CONTACTOR C2 LIGHT CONTROL SHALL BE PHOTOCELL "ON", PHOTOCELL "OFF"
3. MOUNT ALL COMPONENTS SHOWN IN A NEMA 3R ENCLOSURE, U.L. 50 LABELED. ARRANGE ENCLOSURE TO HOUSE ALL COMPONENTS SHOWN. SUBMIT DIMENSIONED DETAIL OF ENCLOSURE SHOWING PLACEMENT OF TERMINAL STRIPS. TIMECLOCK, LIGHTING CONTACTORS, AND OVERRIDE SWITCHES TO THE ELECTRICAL ENGINEER FOR APPROVAL. LAMINATE ONE COPY OF THIS DETAIL AND SECURE IT TO THE INSIDE DOOR OF THE ENCLOSURE.
4. MOUNT CONTACTOR ENCLOSURE ADJACENT TO PANEL "1HG1".

2 PUBLIX SITE LIGHTING CONTROL DIAGRAM
Scale: NONE

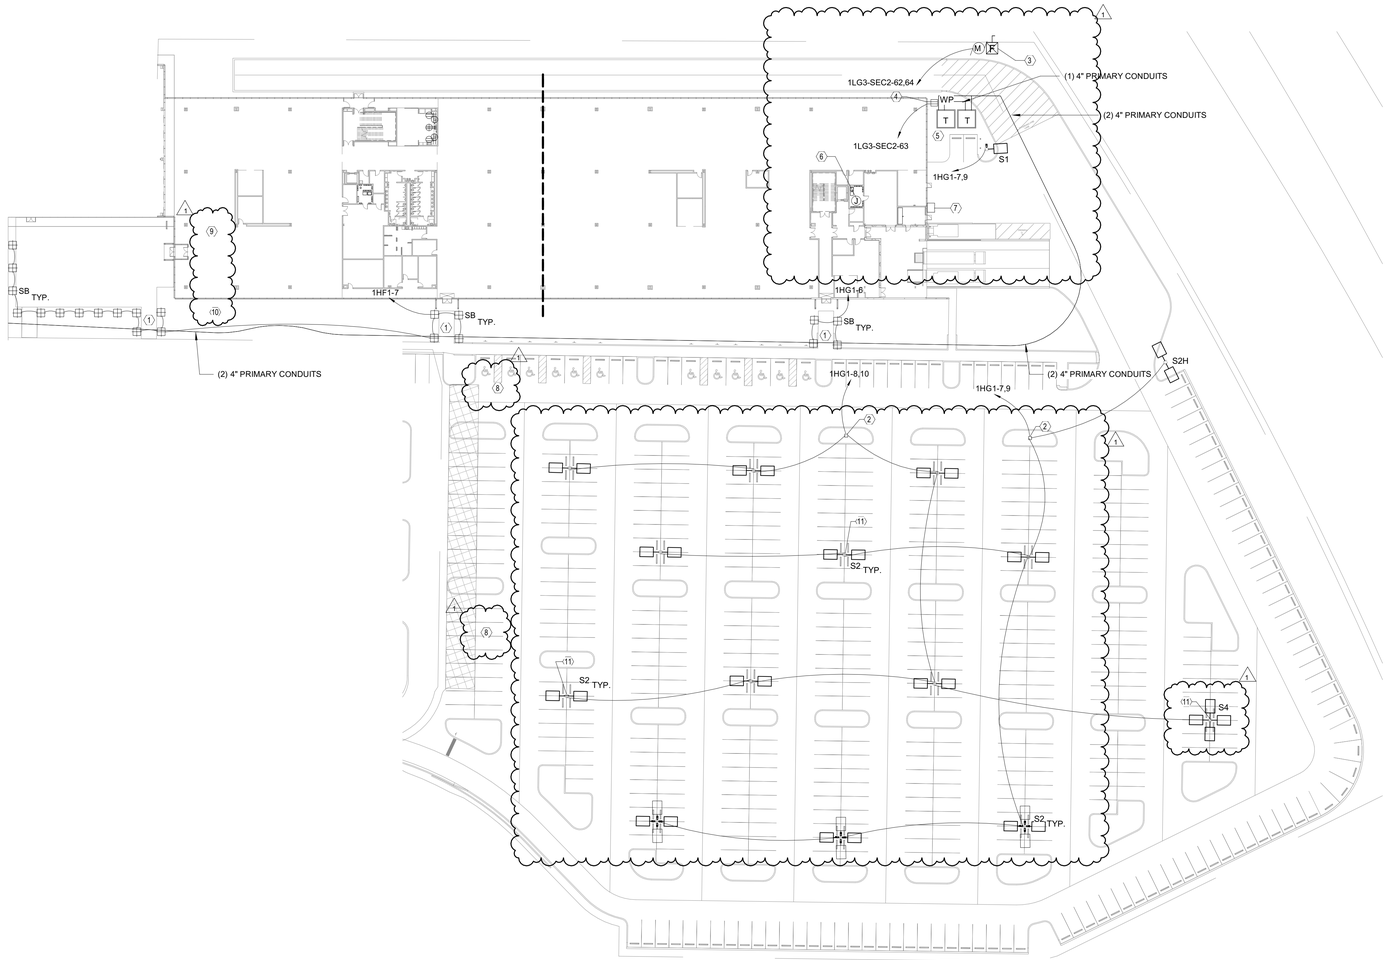

GENERAL NOTES:
1. PRIOR TO INSTALLATION OF NEW SITE LIGHTING FIXTURES AND POLES REMOVE EXISTING POLES AND CONDUIT. REFER TO CIVIL DRAWINGS FOR LOCATIONS OF EXISTING POLES TO BE REMOVED.
2. ALL SITE LIGHTING CONDUCTORS SHALL BE IN #10 3/4" CONDUIT UNLESS OTHERWISE NOTED.
3. ROUTE ALL SITE LIGHTING CIRCUITS THROUGH CONTACTOR CONTROLLED VIA PHOTOCELL AND TIMECLOCK.
4. ALL PULLBOXES LOCATED IN THE PARKING AREA SHALL BE A MINIMUM TIER 22 TRAFFIC RATING. REFER TO PULLBOX DETAIL ON SHEET E6-1-02.

KEYED NOTES

#	KEYNOTE
1	COORDINATE THE LOCATION OF SITE BOLLARDS WITH ARCHITECT AND OWNER PRIOR TO ROUGH IN. PROVIDE QUANTITIES AS SHOWN ON DRAWINGS.
2	PROVIDE 18"X24"X24" DEEP ANSI TIER 15 RATED PULLBOX.LABEL COVER "ELECTRICAL". INSTALL PULLBOX IN LANDSCAPED AREA.
3	WELL PUMP: PROVIDE 100 AMP, 2 POLE, FUSED TO NAMEPLATE, NEMA 3R DISCONNECT SWITCH. PROVIDE CONNECTION WELL PUMP VFD PROVIDED BY IRRIGATION CONTRACTOR VIA (2) #1, (1) #8 GND IN 1-1/4" CONDUIT.
4	IRRIGATION CONTROLLER: PROVIDE WEATHER PROOF GFI RECEPTACLE FOR CONNECTION TO IRRIGATION CONTROLLER. VERIFY EXCAT LOCATION WITH IRRIGATION CONTRACTOR.
5	LAKELAND ELECTRIC PAD MOUNTED TRANSFORMERS: APPROXIMATE LOCATION OF 277/480 VOLT, 3 PHASE, 4 WIRE, PAD MOUNTED TRANSFORMERS. COORDINATE EXACT LOCATION WITH LAKELAND ELECTRIC.
6	SITE LIGHTING CONTROL CABINET LOCATED IN ELECTRICAL ROOM. REFER TO WIRING DIAGRAM ON THIS SHEET.
7	GENERATOR CONNECTIONS CABINET: REFER TO POWER RISER DIAGRAM FOR ADDITIONAL INFORMATION.
8	APPRXIMATE LOCATION OF EXISTING SITE LIGHTING POLES TO BE REMOVED. EC SHALL DEMO THE POLE AND ALL ASSOCIATED CONDUIT CONDUCTORS BACK TO THE NEAREST SITE LIGHTING POLE. IF REMOVAL WILL AFFECT DOWNSTREAM LIGHTING CIRCUIT, RELOCATION OF CONDUIT AND CONDUCTIRS SHALL BE PROVIDED TO MAINTAIN A COMPLETE OPERABLE SYSTEM.
9	APPROXIMATE LOCATION OF EXISTING PULLBOX TO BE RELOCATED. COORDINATE WITH GENERAL CONTRACTOR THE AND CIVIL DRAWINGS A LANDSCAPED AREA TO RELOCATE CONDUITS AND PULLBOX. EXISTING CONDUITS ARE (2) 3" EMPTY CONDUITS. REFER TO POWER RISER DIAGRAM FOR ADDITONAL INFORMATION. THESE CONDUITS ARE INTENDED FOR USE AS LIFE SAFETY GENERATOR FEEDERS, MAIN SHUNT TRIP COIL CONDUCTIRS, AND FIRE ALARM CABLING.
10	PROPOSED LANDSCAPED AREA LOCATION FOR RELOCATED PULLBOX, COORDINATE WITH GENERAL CONTRACTOR AND CIVIL DRAWINGS.
11	PROVIDE POLE MOUNTED CCTV CAMERA. EXTEND 1-1/4" CONDUIT BACK TO IDF ROOM ON FIRST FLOOR. COORDINATE ADDITONAL LOCATIONS OF CAMERAS WITH OWNER.

1 PROJECT SITE PLAN
Scale: 1" = 40'-0"
SCALE: 1" = 40'-0" 0 20' 40' 80' 120'

N TN

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

http://www.aecom.com

REGISTRATION

HENRYK B. JUSZCZYK
LICENSE NO. 58082
STATE OF FLORIDA
PROFESSIONAL ENGINEER

HENRYK B. JUSZCZYK, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 58082

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY HENRYK B. JUSZCZYK, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 58082 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Henryk B Juszczyk
2019.09.30
18:02:13 -04'00'

KEY PLAN

EXISTING	A	B

ISSUE/REVISION

I/R	DATE	DESCRIPTION
1	SEP 30, 2019	100% CONSTRUCTION DOCUMENTS
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

ELECTRICAL PROJECT SITE PLAN

SHEET NUMBER

E1-1-02

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

Last Plotted: 9/30/2019 5:01:39 PM
Filename: BIM 360/900601397-Publix HQ/900601397_Publix HQ_ELECT_R2019-r4

Printed on ___% Post-Consumer Recycled Content Paper
©2016 AECOM Corporation