ARCH E1 30"x42"
Approved:
Checked:
Designer:
Project Management Initials:

Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

LANDSCAPE NOTES:

1. THE EXACT LOCATION OF ALL EXISTING STRUCTURES, UNDERGROUND UTILITIES, DRAINAGE STRUCTURES, EXISTING UNDERGROUND SPRINKLERS AND PIPE MAY NOT BE AS INDICATED ON DRAWINGS. CONTACT SUNSHINE STATE ONE-CALL AS REQUIRED BY CHAPTER 556 OF THE FLORIDA STATUTES PRIOR TO ANY EXCAVATION OR PLANTING ACTIVITIES. FIELD LOCATE ALL UTILITIES, DRAINAGE STRUCTURES, LIGHT POLES, SIGNS AND OTHER VISIBLE STRUCTURES PRIOR TO INSTALLATION OF PLANT MATERIALS. NOTIFY THE OWNER IMMEDIATELY OF ANY POSSIBLE CONFLICTS.
2. PROTECT EXISTING BUILDINGS, COLUMNS, WALKS, WALLS, PAVING, PIPING, AND OTHER FROM DAMAGE DURING CONSTRUCTION. ALL DAMAGE SHALL BE REPAIRED TO THE SATISFACTION OF THE OWNER, AT NO COST TO THE OWNER. UNLESS OTHERWISE SHOWN TO BE REMOVED, BE RESPONSIBLE FOR ALL UNAUTHORIZED CUTTING OR DAMAGE TO EXISTING TREES AND SHRUB/GROUNDCOVER PLANTINGS NOT SHOWN TO BE REMOVED. THIS INCLUDES, BUT IS NOT LIMITED TO, DAMAGE CAUSED BY OPERATION OF EQUIPMENT, STOCKPILING OF MATERIALS, CARELESS LABOR, OR OTHER CONTRACTOR ACTIVITIES. THIS ALSO INCLUDES COMPACTION BY DRIVING OR PARKING INSIDE DRIP-LINE OF TREES OR THE SPILLING OF OIL, GASOLINE, OR OTHER DELETERIOUS MATERIALS WITHIN THE DRIP-LINE OF TREES.
3. MAINTAIN EXISTING REGULATORY SIGNAGE TO THE GREATEST EXTENT POSSIBLE DURING CONSTRUCTION.
4. CONDUCT WORK IN A MANNER TO PREVENT INTERRUPTION OR DAMAGE TO EXISTING SYSTEMS. PROTECT UTILITY SERVICES WHICH MUST REMAIN OPERATIONAL AND REPAIR OR REPLACE IF DAMAGED.
5. THE WORK CONSISTS OF THE COMPLETE INSTALLATION OF PLANT MATERIALS, MULCH, SOIL, SOD, WATER AND INCIDENTAL ITEMS AS SHOWN ON THE DRAWINGS AND SPECIFIED HEREIN. THE WORK SHALL INCLUDE THE FURNISHING OF ALL LABOR, EQUIPMENT, MATERIALS AND APPLIANCES REQUIRED FOR THE COMPLETE LANDSCAPE AND IRRIGATION INSTALLATION AS SHOWN ON THE PLANS. THE WORK SHALL ALSO INCLUDE THE MAINTAINING OF ALL PLANTS AND PLANTING AREAS UNTIL FINAL ACCEPTANCE BY THE OWNER.
6. ALL PLANT MATERIALS SHALL BE STAKED IN THE FIELD FOR APPROVAL A MINIMUM OF ONE (1) WEEK PRIOR TO INSTALLATION OR AS APPROVED BY THE OWNER.
7. WHEN APPROVED BY THE OWNER, THE LOCATIONS OF PLANTS MAY BE ADJUSTED TO ACCOMMODATE UNFORESEEN FIELD CONDITIONS, TO COMPLY WITH SAFETY AND MAINTENANCE SETBACKS, OR AS OTHERWISE DIRECTED OR APPROVED BY THE OWNER.
8. ALL PLANT MATERIAL LOCATIONS SHALL BE INSTALLED IN ACCORDANCE WITH ANY APPLICABLE LOCAL UTILITY PROVISIONS. IF UTILITIES OR OBSTRUCTIONS ARE ENCOUNTERED DURING PLANT INSTALLATION, INFORM THE OWNER IMMEDIATELY. ALTERNATE LOCATIONS FOR PLANT MATERIALS ARE SUBJECT TO THE APPROVAL BY THE OWNER. SUCH CHANGES IN LOCATION SHALL BE MADE WITHOUT ADDITIONAL COMPENSATION.
9. ALL PLANTING SHALL BE DONE IN ACCORDANCE WITH THE FLORIDA NURSERYMEN'S AND GROWER'S ASSOCIATIONS APPROVED PRACTICES.
10. ALL PLANT MATERIALS SHALL BE FLORIDA GRADE #1 MINIMUM AT THE TIME OF DELIVERY AND SHALL MAINTAIN FLORIDA GRADE #1 CHARACTERISTICS THROUGHOUT THE INSTALLATION AND WARRANTY PERIOD AS SPECIFIED IN "GRADES AND STANDARDS FOR NURSERY PLANTS", LATEST EDITION. BY DIVISION OF PLANT INDUSTRY, FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES. PLANT MATERIAL SHALL ALSO CONFORM TO THE CURRENT AMERICAN ASSOCIATION OF NURSERYMEN "STANDARDS FOR NURSERY STOCK", LATEST EDITION. ALL TREES TO HAVE STRAIGHT, SINGLE TRUNK UNLESS OTHERWISE NOTED ON PLANS. FURNISH AND INSTALL PLANT SPECIES IN ACCORDANCE WITH THE SIZES AND GRADES SPECIFIED IN THE PLANT SCHEDULE.
11. ALL PLANTS SHALL NOT DEMONSTRATE EVIDENCE OF PREVIOUS CONTAINER CONFINEMENT. ANY INDICATION OF ROOT DEVELOPMENT RESTRICTION, GIRDLING/CIRCLING ROOTS, OR EXCESSIVE ROOTS EXPOSED ABOVE THE SOIL SURFACE SHALL BE GROUNDS FOR REJECTION.
12. FURNISH PLANT MATERIALS FREE FROM INSECTS, DISEASES, PARASITES, OR HARMFUL TOXIC CHEMICAL SUBSTANCES. ALL PLANT MATERIAL SHALL HAVE NO LICHENS, ALGAE OR FUNGI ATTACHED ON MORE THAN 10% OF PLANT. PLANT MATERIAL SHALL HAVE NO SPANISH MOSS (TILLANDSIA USNEOIDES) ON OR WITHIN PLANT CANOPY.
13. THE CONTRACTOR SHALL GUARANTEE, IN WRITING, PLANT SURVIVABILITY FOR A WARRANTY PERIOD OF TWELVE (12) MONTHS FROM FINAL ACCEPTANCE BY THE OWNER.
14. ALL ON-SITE PLANT MATERIAL DELIVERIES SHALL TAKE PLACE ON MONDAY THROUGH THURSDAY ONLY UNLESS OTHERWISE DIRECTED BY THE OWNER. ENSURE THAT ALL PLANT MATERIALS ARE DELIVERED ON SITE UNDAMAGED FROM TRANSPORTATION OR DIGGING OPERATIONS. THE OWNER WILL REJECT ANY MATERIAL THAT HAS BEEN DAMAGED OR RENDERED UNACCEPTABLE DUE TO RELOCATION OR TRANSPORTATION FROM POINT OF ORIGIN. ALL PLANT MATERIAL SHALL BE PROTECTED FROM SUN, WIND, AND OTHER DAMAGE, DURING DELIVERY. ALL PLANT MATERIALS MUST BE AVAILABLE TO BE INSPECTED BY THE OWNER PRIOR TO PLANTING.
15. THE PROPOSED PLANTINGS ARE LOCATED TO ALLOW MAINTENANCE ACCESS AND SHALL NOT OBSTRUCT ACCESS TO STORMWATER MANAGEMENT FACILITIES.
16. ALL SWALES, DITCHES AND OTHER DRAINAGE CONVEYANCE SYSTEMS SHALL BE KEPT CLEAR OF OBSTRUCTIONS BY ALL LANDSCAPING EXCEPT SOD.
17. ANY TURF THAT IS DISTURBED BY CONSTRUCTION ACTIVITIES SHALL BE RE-GRADED AND REPLACED. ALL RESTORATION OF DISTURBED AREAS SHALL BE PERFORMED WITH SOD TO MATCH EXISTING UNLESS OTHERWISE DIRECTED BY THE OWNER. NO ADDITIONAL PAYMENT WILL BE MADE.
18. THE JOB SITE SHALL BE KEPT ORDERLY AND REASONABLY CLEAN ON A DAILY BASIS DURING CONSTRUCTION OPERATIONS. UPON DAILY COMPLETION OF WORK, REMOVE ALL DEBRIS AND WASTE GENERATED BY CONSTRUCTION OPERATIONS, INCLUDING THE DAILY CLEANING OF WALLS, PAVING, CURBS, SIDEWALKS, AND TURF AREAS.
19. SUBMITTALS
    - A. SUPPLY THE FOLLOWING ITEMS AND SUBMIT TO THE OWNER FOR APPROVAL:
        - a. SAMPLE OF ORGANIC MULCH MATERIAL.
        - b. SAMPLE OF BLENDED SOIL.
        - c. FERTILIZER ANALYSIS, MANUFACTURER'S LABEL, AND APPLICATION RATES.
        - d. MANUFACTURER'S LABEL AND APPLICATION RATES FOR ALL PESTICIDES.
        - e. A SCHEDULE OF VALUES FOR ALL LANDSCAPE AND IRRIGATION MATERIALS AND INCIDENTALS SPECIFIED IN THE PLANS SHALL BE SUBMITTED PRIOR TO COMMENCEMENT OF THE WORK.
        - f. PRIOR TO PLANTING, A COLOR PHOTOGRAPH SUBMISSION FOR ALL TREES AND FOR EACH PLANT SPECIFIED SHALL BE SUBMITTED TO THE LANDSCAPE ARCHITECT AND/OR OWNER'S REPRESENTATIVE FOR APPROVAL. EACH APPROVED PLANT PHOTOGRAPH SHALL BE THE MINIMUM STANDARD ACCEPTED FOR EACH PLANT SPECIES AND PLANT MATERIAL NOT MEETING THIS STANDARD SHALL BE REJECTED. THE PLANT PHOTOGRAPH SHALL SHOW THE ENTIRE PLANT AND HAVE A LEGIBLE SCALE TO SHOW THE OVERALL HEIGHT AND SPREAD OF THE PLANT. PHOTOGRAPHS SHALL INDICATE THE GENUS, SPECIES, AND SIZE OF THE PLANT IN THE PHOTO.
20. BALLED AND BURLAPPED PLANTING MEDIUM
    - A. BALLED AND BURLAPPED MATERIALS ARE TO BE ROOTED AND GROWN IN SIMILAR PLANTING MEDIUM AS THE PROPOSED LOCATION SOIL CONDITIONS. CLAY SOIL ROOTBALLS WILL NOT BE ACCEPTED.
    - B. ALL BALLED AND BURLAPPED MATERIALS SHALL EXHIBIT WHITE FEEDER ROOTS PROTRUDING FROM THE BURLAP AT THE TIME OF DELIVERY
    - C. SHOULD ANY DISCREPANCIES MATERIALIZE DUE TO THE ROOTBALL MEDIUM, THE LANDSCAPE ARCHITECT AND/OR OWNER'S REPRESENTATIVE SHALL DIRECT IMMEDIATE REMOVAL OF ALL UNSUITABLE MATERIALS AT NO ADDITIONAL COST.
21. PLANT SUPPLEMENTS
    - A. ALL PLANT MATERIAL AND PALMS SHALL BE FERTILIZED WITH A 3-MONTH SLOW RELEASE 8-2-12 +4 MG. ONE HUNDRED PERCENT (100%) OF N, K, AND MG SHALL BE IN CONTROLLED RELEASE FORM AND MICRONUTRIENTS SHALL BE IN SULFATE OR CHELATE (FE ONLY). FERTILIZER SHALL CONTAIN 1.5%-2% MN AND FE PLUS TRACE AMOUNTS OF B (0.15%), ZN (0.15%), AND CU (0.05%). SUBMIT SAMPLES OF FERTILIZER TO THE OWNER FOR APPROVAL.
    - B. ALL PLANT MATERIALS SHALL BE FERTILIZED AT THE TIME OF PLANTING, AT 3-MONTH INTERVALS, AND PRIOR TO COMPLETION OF THE INSTALLATION PERIOD. NOTIFY THE OWNER IN WRITING 48 HOURS IN ADVANCE OF ALL FERTILIZER APPLICATIONS. FOLLOW ALL MANUFACTURERS RECOMMENDATIONS.
    - C. ADHERE TO ALL APPLICABLE FERTILIZER RESTRICTIONS AND REGULATIONS.
22. HERBICIDE AND INSECTICIDE
    - A. ALL PRE AND POST HERBICIDAL TREATMENTS SHALL INCLUDE A TEMPORARY TRACER DYE IDENTIFIABLE FOR A MINIMUM OF TWO (2) DAYS AFTER APPLICATION. USE CARE AROUND TREE ROOTS. SUBMIT SAMPLES OF HERBICIDE AND TRACER DYE TO THE OWNER FOR APPROVAL.
23. STAKING AND GUYING
    - A. ALL TREES SHALL BE INSTALLED PER FDOT STANDARD PLANS 580-001, LATEST EDITION, UNLESS OTHERWISE INDICATED IN THE PLANS.
    - B. ALL SHRUBS AND GROUNDCOVER SHALL BE INSTALLED AS INDICATED IN THE PLANS.
    - C. MAINTAIN ALL STAKING AND GUYING IN GOOD CONDITION AT ALL TIMES. REMOVE STAKING 1 YEAR AFTER INSTALLATION OR AS DIRECTED BY THE OWNER.
24. MULCH
    - A. ORGANIC MULCH MATERIAL SHALL BE STERILIZED, SHREDDED MELALEUCA AND SHALL BE APPLIED TO ALL PLANTING AREAS AND TREE RINGS AT A MINIMUM WETTED DEPTH OF THREE (3) INCHES UNLESS DIRECTED OTHERWISE ON PLANS. MINIMUM 3" DEPTH SHALL BE MAINTAINED THROUGHOUT THE INSTALLATION PERIOD.
25. WEED AND LITTER CONTROL
    - A. DURING THE PROJECT INSTALLATION PERIOD, KEEP THE INDIVIDUAL PLANTING LOCATIONS AND PLANTING BEDS FREE OF LITTER AND UNDESIRABLE VEGETATION.
26. PLANTING SOIL BACKFILL SHALL BE AS FOLLOWS:
    - A. MIXTURE FOR TREES, SHRUBS, AND GROUNDCOVER SHALL BE THOROUGHLY MIXED AND CONSIST OF THE FOLLOWING:
      1/3 BLENDED SOIL (SEE REQUIREMENTS BELOW)
      1/3 COARSE SAND
      1/3 EXISTING SOIL

      BLENDED SOIL SHALL CONSIST OF THE FOLLOWING:
      1/3 MUSHROOM COMPOST OR PEAT
      1/3 COMPOSTED COW MANURE
      1/3 COMPOSTED BARK
    - B. CONTRACTOR SHALL TAKE RESPONSIBILITY FOR PERFORMING PERCOLATION TESTS PRIOR TO BACKFILLING WITH APPROVED PLANTING SOIL. NOTIFY THE OWNER IMMEDIATELY IF PERCOLATION DOES NOT SUPPORT HEALTHY GROWTH OF PLANTINGS.
27. THE CONTRACTOR SHALL BE RESPONSIBLE FOR EXAMINING FULLY BOTH THE SITE AND THE BID DOCUMENTS. DISCREPANCIES IN THE DOCUMENTS OR THE ACTUAL SITE CONDITIONS SHALL BE REPORTED TO THE OWNER IN WRITING AT THE TIME OF BIDDING OR DISCOVERY. NO ACCOUNT SHALL BE MADE AFTER CONTRACT COMPLETION FOR FAILURE TO REPORT SUCH CONDITION, OR FOR ERRORS ON THE PART OF THE CONTRACTOR AT THE TIME OF BIDDING.
28. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SECURING ALL NECESSARY APPLICABLE PERMITS AND LICENSES TO PERFORM THE WORK SET FORTH IN THIS PLAN SET AND THE SPECIFICATIONS. ALL PERMITS NECESSARY ARE TO BE PROVIDED BY THE INSTALLING CONTRACTOR UNLESS OTHERWISE SPECIFICALLY STATED IN THE SPECIFICATIONS.
29. PLANT MATERIAL SHALL BE BID AS SPECIFIED UNLESS UNAVAILABLE, AT WHICH TIME THE OWNER SHALL BE NOTIFIED BY TELEPHONE AND IN WRITING OF INTENDED CHANGES.
30. NO CONTRACTOR IDENTIFICATION SIGNS SHALL BE PERMITTED ON THE PROJECT, EXCEPT FOR THE PROJECT INFORMATION SIGNS.

ABBREVIATIONS

CONT = CONTAINER
CT = CLEAR TRUNK
GAL = GALLON
FG = FIELD GROWN
HT = HEIGHT
OAH = OVERALL HEIGHT
MIN = MINIMUM
OC = ON-CENTER
SF = SQUARE FEET
LF = LINEAR FEET
SPR = SPREAD
TYP = TYPICAL
QTY = QUANTITY
CAL = CALIPER
VUA = VEHICULAR USE AREA

NOTE:
ALL TREES SHALL BE INSTALLED PER FDOT STANDARD PLANS 580-001, LATEST EDITION.

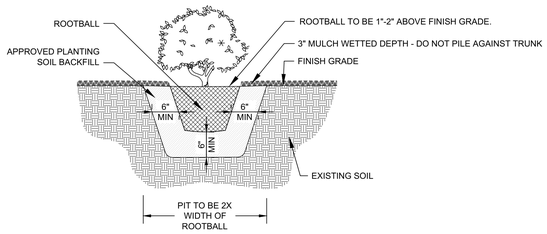

1 NTS **SHRUB & GROUND COVER PLANTING DETAIL**

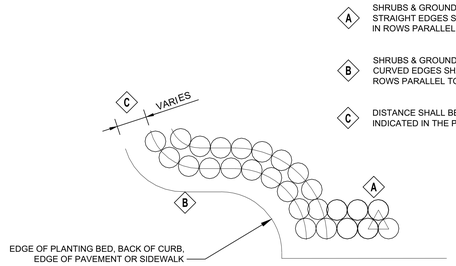

A SHRUBS & GROUND COVERS ADJACENT TO STRAIGHT EDGES SHALL BE TRIANGULAR SPACED IN ROWS PARALLEL TO THE STRAIGHT EDGE.

B SHRUBS & GROUND COVERS ADJACENT TO CURVED EDGES SHALL BE PLANTED IN ROWS PARALLEL TO THE CURVED EDGE.

C DISTANCE SHALL BE THE ON-CENTER SPACING INDICATED IN THE PLANT SCHEDULE.

2 NTS **SHRUB & GROUND COVER LAYOUT DETAIL**

PLANT SCHEDULE

EXISTING TO BE REMOVED	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	REMARKS
	EX-QV	5	QUERCUS VIRGINIANA	SOUTHERN LIVE OAK	EXISTING	EXISTING TREE TO BE REMOVED - REFER TO TREE DISPOSITION & TREE MITIGATION TABLES
TYPE `A` TREES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	REMARKS
	MG	6	MAGNOLIA GRANDIFLORA `D.D. BLANCHARD` TM	SOUTHERN MAGNOLIA	65 GAL	12` HT MIN X 6` SPR MIN, 3" CAL MIN, FULL-TO-GROUND, SINGLE LEADER, FL #1 GRADE
	QV	43	QUERCUS VIRGINIANA	SOUTHERN LIVE OAK	30 GAL	8` HT MIN, 1.5" CAL MIN, SINGLE LEADER, FL #1 GRADE
TYPE `B` TREES	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	REMARKS
	LM	23	LAGERSTROEMIA X `MUSKOGEE`	LAVENDER CRAPE MYRTLE MULTI-TRUNK	30 GAL	8` HT MIN, 2" TOTAL CAL MIN, MULTI-TRUNK, 3-5 STEMS, FL #1 GRADE
	TD	29	TAXODIUM DISTICHUM	BALD CYPRESS	30 GAL	8` HT MIN, 1.5" CAL MIN, SINGLE LEADER, FL #1 GRADE
SHRUBS	CODE	QTY	BOTANICAL NAME	COMMON NAME	SIZE	REMARKS
	VO	172	VIBURNUM ODORATISSIMUM	SWEET VIBURNUM	3 GAL	18" HT MIN X 24" SPR MIN, SPACING 4` OC
GROUND COVERS	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	REMARKS
	TA	1,414	TRACHELOSPERMUM ASIATICUM `MINIMA`	MINIMA JASMINE	1 GAL	6" HT MIN X 12" SPR MIN, FULL, DENSE FOLIAGE, SPACING 24" OC
SOD	CODE	QTY	BOTANICAL NAME	COMMON NAME	CONT	REMARKS
	PN	36,097 SF	PASPALUM NOTATUM `ARGENTINE`	ARGENTINE BAHIA GRASS	1`-2` RECTANGLES	COMPLY WITH FDOT STANDARD SPECIFICATIONS SECTION 570, LATEST EDITION
	SS	15,892 SF	STENOTAPHRUM SECUNDATUM `FLORITAM`	FLORITAM ST. AUGUSTINE SOD	1`-2` RECTANGLES	COMPLY WITH FDOT STANDARD SPECIFICATIONS SECTION 570, LATEST EDITION
	SS2	9,232 SF	STENOTAPHRUM SECUNDATUM `FLORITAM`	FLORITAM ST. AUGUSTINE SOD	PLUGS	1 PLUG PER TURF BLOCK MIN

Tree Disposition Table

Tree Number	Species	DBH (inches)	Condition (Poor, Fair, Good)	Status
1	*Quercus virginiana* (Live Oak)	12	Good	Remove
2	*Quercus virginiana* (Live Oak)	13	Good	Remove
3	*Quercus virginiana* (Live Oak)	9	Fair	Remove
4	*Quercus virginiana* (Live Oak)	11	Good	Remove
5	*Quercus virginiana* (Live Oak)	13	Good	Remove

Tree Mitigation Table

Trees Removed with DBH 6"-23"	Class of Removed Trees (A or B)	Replacement Trees Required per Removal	Replacement Trees Required (Type 'A')	Replacement Trees Provided (Type 'A')
5	A	2	10	10

Minimum Tree Density

Trees Required				Trees Provided		
Tree Type	Trees per 5,445 SF (1/8 AC)	Total SF	Total Trees	*Type 'A' Trees	Type 'B' Trees	*Total Trees (Type 'A' + ½ Type 'B')
A	1	352486	64.7	49	55	67

Development Adjacent to Limited Access Highways

Trees Required				Trees Provided
Tree Type	Trees per 50 LF	Total LF	Total Trees	Type 'A' Trees
A	1	570	11.4	12

Frontage Buffer (Option 2)

Trees Required				Trees Provided		
Tree Type	Trees per 100 LF	Total LF	Total Trees	Type 'A' Trees	Type 'B' Trees	Total Trees
B	4	570	22.8	6	18	24
Inludes 7.5' wide plantier strip with a Type 'A' Hedge.						

Side/Rear Yard Landscaping (Option 1)

Trees Required				Trees Provided
Tree Type	Trees per 20 LF	Total LF	Total Trees	Type 'B' Trees
B	1	578	28.9	29
Includes a 7.5' wide planter strip with turfgrass.				

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

NICHOLAS A. MYERS LICENSE LA 6667226 STATE OF FLORIDA LANDSCAPE ARCHITECT

Nicholas A Myers
Digitally signed by Nicholas A Myers
Date: 2019.08.23 09:17:06 -04'00'

NICHOLAS A. MYERS, RLA

LANDSCAPE ARCHITECT OF RECORD

THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE DIGITALLY SIGNED AND SEALED UNDER RULE 61G10-11.011, F.A.C.

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUG 23, 2019	CONSTRUCTION DOCUMENTS

PROJECT NUMBER

60601397

SHEET TITLE

LANDSCAPE NOTES, DETAILS, PLANT SCHEDULE, AND DATA TABLES

SHEET NUMBER

LS-001

Last Plotted: 8/21/2019 2:55:54 PM
Filename: S:\PROJECTS_CIVIL\TPROJECTS\PUBLIX\900-DIVOS\900-CAD_BIM (CIVIL)\30-SHEETS\LLS-100 LANDSCAPE PLAN.DWG
Printed on ___% Post-Consumer Recycled Content Paper
©2016 AECOM Corporation