M2-1-01-CENTRAL PLANT HVAC PLAN
Project Management Initials: Designer: Designer Checkest: Checker Approved: Approver/ARCH E1 30"x42"

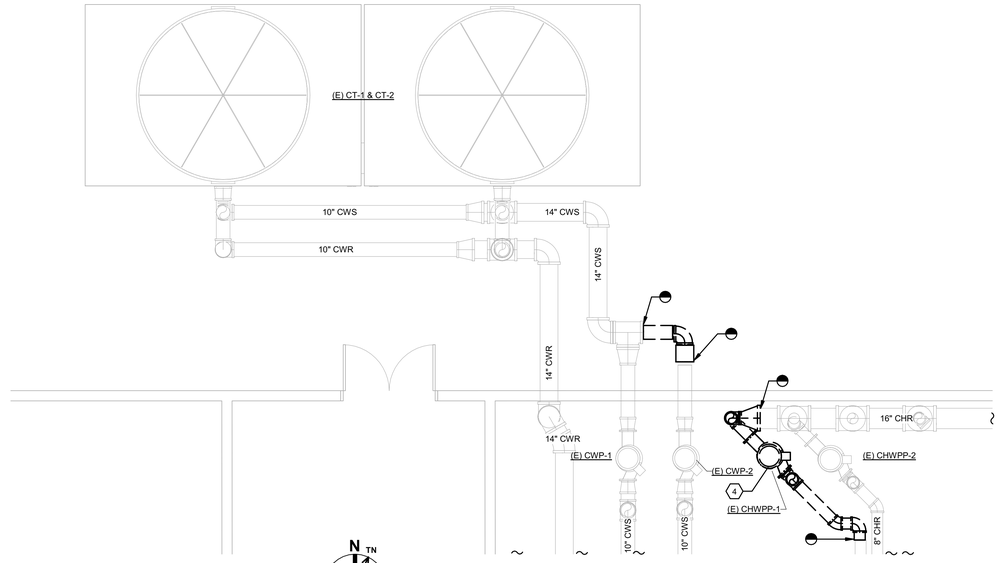

2 CENTRAL PLANT DEMO PLAN

Scale: 1/4" = 1'-0"

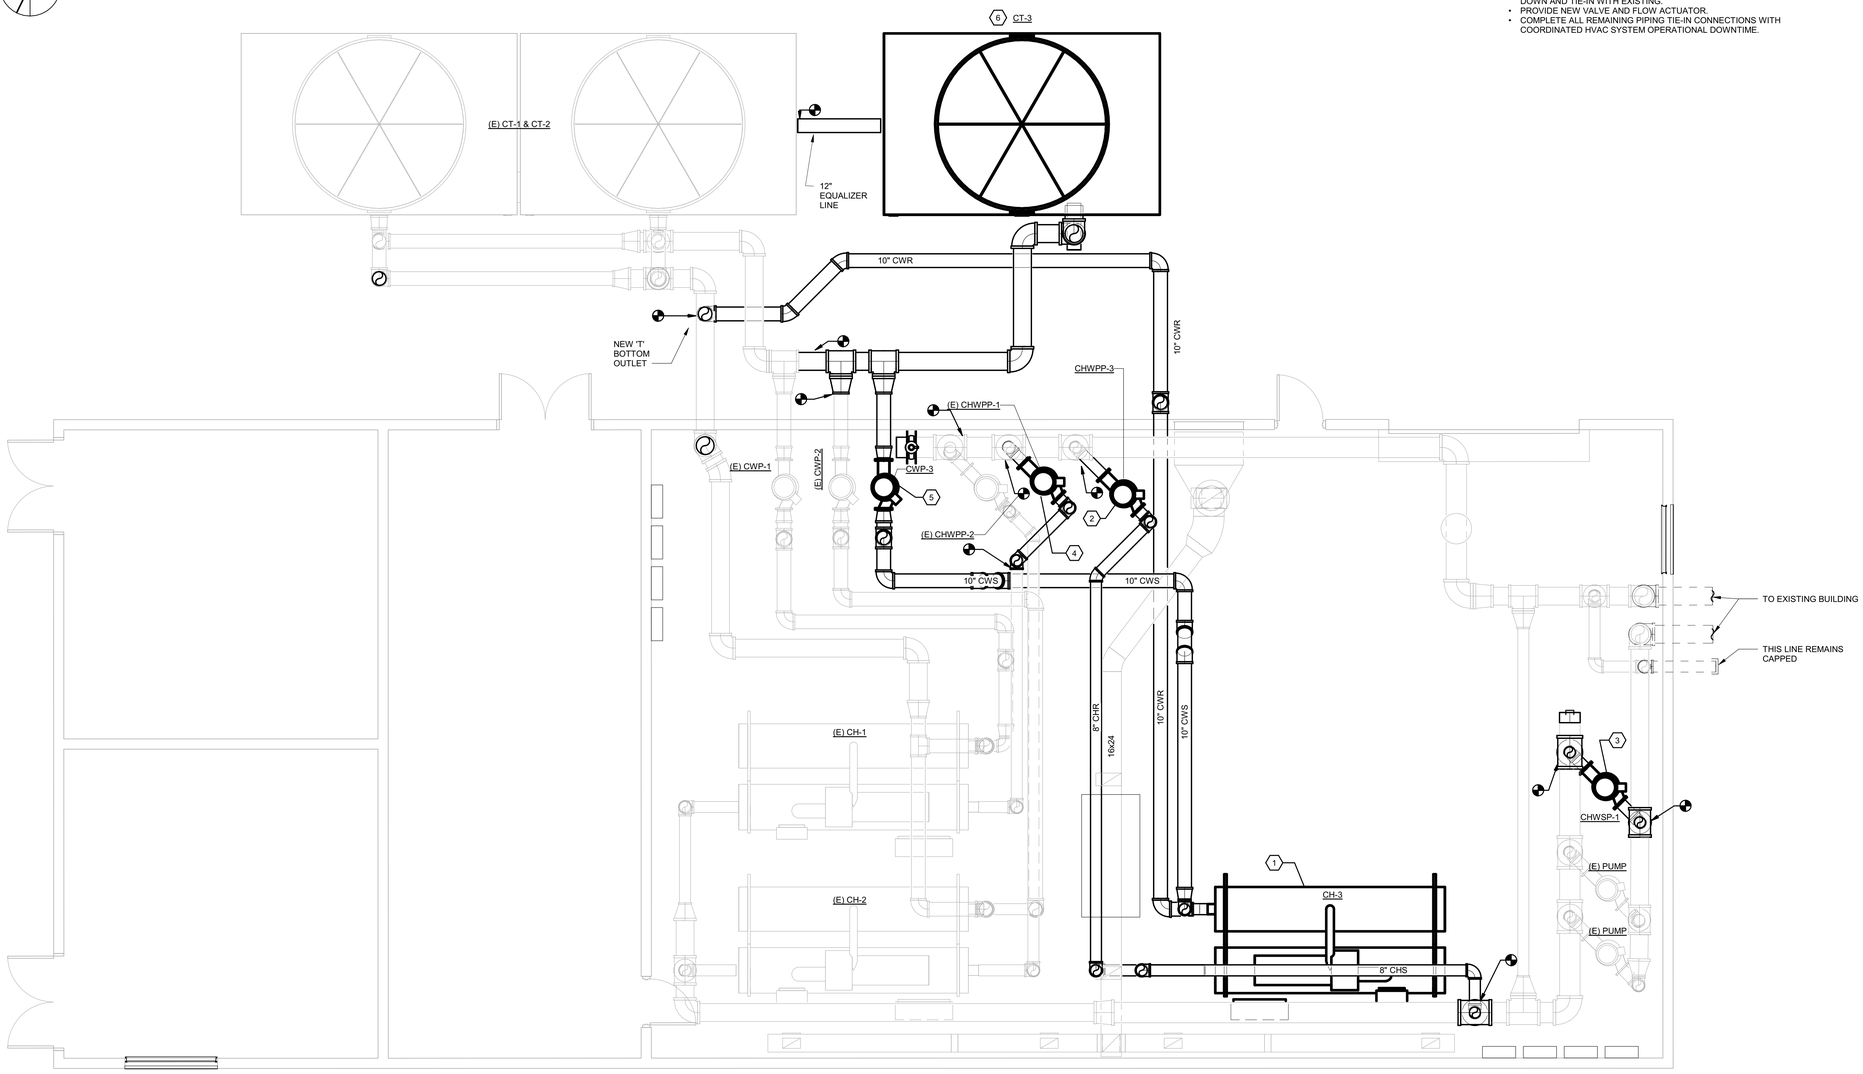

1 CENTRAL PLANT

Scale: 1/4" = 1'-0"

KEYED NOTES
INSTALL NEW 450-TON WATER COOLED CHILLER AND 650-TON COOLING TOWER.

1. CH-3:
   - NEW 450-TON CHILLER
   - INSTALL NEW CHILLER CH-3 AS INDICATED.
   - EXTEND AND CONNECT CH-3 CHILLED WATER DISCHARGE PIPING TO EXISTING CHILLED WATER SUPPLY HEADER. ISOLATE FROM SYSTEM UNTIL PREPARED FOR START-UP.
2. CHWPP-3:
   - NEW CHILLED WATER PRIMARY SUPPLY PUMP.
   - INSTALL NEW CHILLED WATER PRIMARY SUPPLY (CHWPP-3) PUMP AS INDICATED.
   - COORDINATE RELOCATION OF EXISTING WATER TREATMENT SYSTEM WITH VENDOR AND FACILITY MANAGER.
   - CONNECT PUMP TO EXISTING CHILLED WATER RETURN (CHWR) HEADER, SUCTION SIDE.
   - EXTEND AND CONNECT CHWPP-3 DISCHARGE PIPING TO NEW CH-3 CHILLED WATER RETURN INLET.
3. CHWSP-3:
   - NEW CHILLED WATER SECONDARY SUPPLY PUMP.
   - INSTALL NEW CHILLED WATER SECONDARY SUPPLY PUMP, CHWSP-3 AS INDICATED.
   - CONNECT CHWSP-3 DISCHARGE PIPING TO EXISTING CHILLED WATER SUPPLY (CHWS) HEADER. ISOLATE FROM SYSTEM UNTIL PREPARED FOR START-UP.
   - EXTEND AND CONNECT SUCTION SIDE PIPING TO EXISTING CHILLED WATER SUPPLY HEADER AS INDICATED. ISOLATE FROM SYSTEM UNTIL PREPARED FOR START-UP.
4. CHWPP-1 RELOCATION/REPLACEMENT:
   - NEW CHILLED WATER PRIMARY PUMP TO REPLACE EXISTING AT NEW LOCATION.
   - INSTALL NEW CHWPP-1 AS INDICATED.
   - MODIFY CHILLED WATER RETURN DISCHARGE PIPING FROM NEW CHWPP-1 AND EXISTING CHWPP-2 TO RESPECTIVE CHILLERS AS INDICATED. WORK SHALL BE PERFORMED WITHOUT HVAC SYSTEM OPERATIONAL DOWNTIME DURING NORMAL BUSINESS HOURS.
   - MODIFY AND SHORTEN CHWR HEADER AS INDICATED/REQUIRED TO MAKE ROOM FOR INSTALLATION OF NEW CONDENSER WATER SUPPLY PUMP CWP-3.
5. CWP-3:
   - NEW CONDENSER WATER SUPPLY PUMP.
   - INSTALL NEW CONDENSER WATER SUPPLY PUMP, CWP-3 AS INDICATED.
   - EXTEND AND CONNECT CWP-3 DISCHARGE PIPING TO NEW CHILLER CH-3 CONDENSER WATER INLET. ISOLATE FROM SYSTEM UNTIL PREPARED FOR START-UP.
   - EXTEND SUCTION SIDE PIPING THROUGH WALL AND CONNECT TO NEW CONDENSER WATER SUPPLY HEADER. ISOLATE FROM SYSTEM UNTIL PREPARED FOR START-UP.
6. CT-3:
   - NEW 650-TON COOLING TOWER
   - INSTALL NEW COOLING TOWER CT-3 AS INDICATED.
   - INSTALL NEW SUPPLY AND RETURN CONDENSER WATER PIPING AS INDICATED TO THE GREATEST EXTENT POSSIBLE PRIOR TO SHUT-DOWN AND TIE-IN WITH EXISTING.
   - PROVIDE NEW VALVE AND FLOW ACTUATOR.
   - COMPLETE ALL REMAINING PIPING TIE-IN CONNECTIONS WITH COORDINATED HVAC SYSTEM OPERATIONAL DOWNTIME.

Building Inspection Division
Lakeland
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Date: 11/15/19
Permit Number: BLD19-06035

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHTIECTURE
LICENSE NO. AA260000687

ENGINEERING
CA LIC. NO. 8115

www.aecom.com

REGISTRATION

JOHN TYE RECTOR
LICENSE
No. 53292
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

JOHN T. RECTOR, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 53292
08/22/19

John T Rector
John T Rector
2019.08.22
16:10:26 -04'00'

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY JOHN T. RECTOR, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 53292 ON THE DATE ADJACENT TO THE SEAL. PRINTED COPIES OF THIS DOCUMENT MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

ISSUE/REVISION

I/R	DATE	DESCRIPTION
	AUG 23, 2019	CONSTRUCTION DOCUMENTS
	MAY 31, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

CENTRAL PLANT HVAC PLAN

SHEET NUMBER

M2-1-01

Last Plotted: 8/22/2019 4:07:35 PM
Filename: BM 3600\60601397-Publix HQ\60601397_Publix HQ_MECH_R2019.rvt
Printed on ___% Post-Consumer Recycled Content Paper
©2016 AECOM Corporation