Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

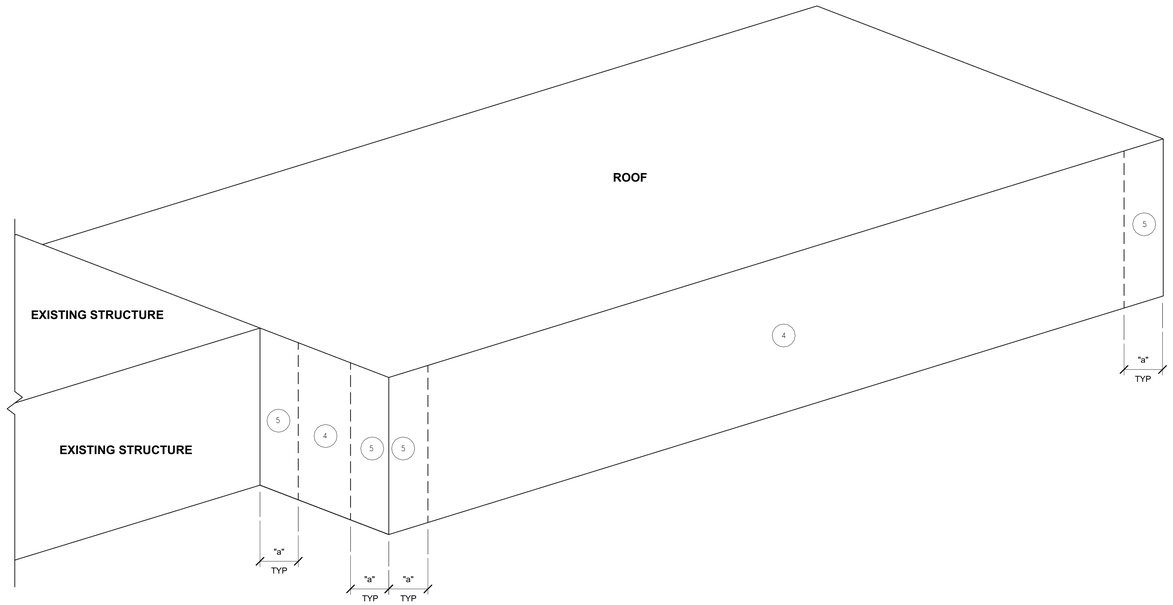

WALL ZONES (ISOMETRIC)

NOTE: WIDTH OF EDGE STRIP "a" = 13'-6"

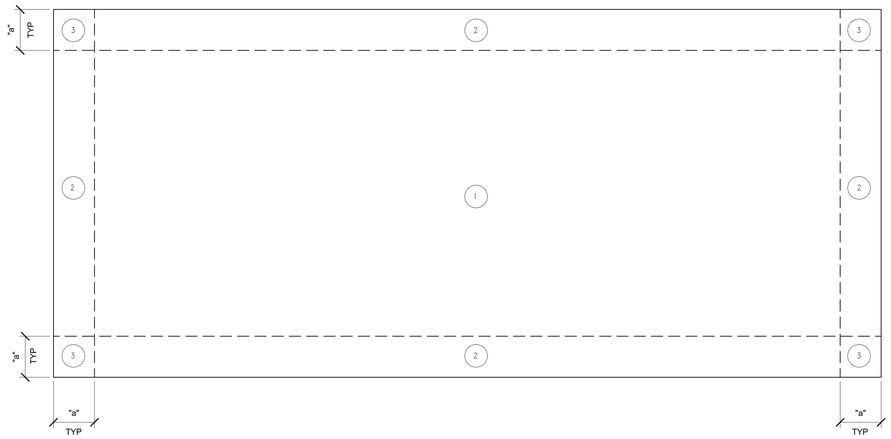

ROOF ZONES (PLAN)

NOTE: WIDTH OF EDGE STRIP "a" = 13'-6"

>>COMPONENT & CLADDING NOTES:

CC1. ALL COMPONENT & CLADDING MATERIALS NOT SPECIFICALLY DESIGNED OR OTHERWISE NOTED ON THESE DWGS SHALL SAFELY RESIST THESE MINIMUM DESIGN WIND PRESSURES FOR THE SUBJECT MEMBER'S EFFECTIVE WIND AREA AS WELL AS THE WIND PRESSURES RESULTING FROM THE DESIGN WIND SPEED AND APPLICABLE CODES AS INDICATED ON THE STRUCTURAL NOTES AND SPECIFICATIONS (WHICHEVER ARE GREATER). THE EFFECTIVE WIND AREA SHALL BE DEFINED AS THE SPAN LENGTH MULTIPLIED BY AN EFFECTIVE WIDTH THAT NEED NOT BE LESS THAN ONE-THIRD THE SPAN LENGTH. FOR CLADDING FASTENERS, THE EFFECTIVE WIND AREA SHALL NOT BE GREATER THAN THE AREA THAT IS TRIBUTARY TO AN INDIVIDUAL FASTENER.

CC2. DESIGN WIND ZONES INDICATED SHALL BE LOCATED IN ACCORDANCE WITH THE ADJACENT SCHEMATIC ROOF AND WALL ZONE LOCATION DIAGRAMS.

CC3. PLUS AND MINUS SIGNS SIGNIFY GROSS COMPONENT PRESSURES ACTING TOWARD AND AWAY FROM BLDG SURFACES.

CC4. FOR EFFECTIVE AREAS BETWEEN THOSE LISTED, THE LOAD MAY BE INTERPOLATED OR USE THE LOAD ASSOCIATED WITH THE LOWER AREA.

CC5. STEEL JOISTS SHALL BE DESIGNED AS COMPONENT (NOT MWFRS) ELEMENTS. THESE ULTIMATE DESIGN PRESSURES MUST BE MULTIPLIED BY 0.6 IN ORDER TO CONVERT THEM TO SERVICE WIND PRESSURES (W) WHEN USING LOAD COMBINATIONS IN FLORIDA BUILDING CODE 2017, SECTION 1605.3.

CC6. STEEL JOIST MANUFACTURER SHALL REDUCE THE GROSS UPLIFT DESIGN FORCES BY 9 PSF (ULTIMATE) IN ORDER TO DETERMINE MINIMUM NET DESIGN UPLIFT FORCE FOR ROOF JOISTS SUBJECTED TO WIND UPLIFT.

CC7. OVERHANG PRESSURES INCLUDE PRESSURE CONTRIBUTION FROM BOTH UPPER AND LOWER SURFACES. COMPONENT PRESSURES ACTING TOWARD AND AWAY FROM THE BOTTOM SURFACE OF SOFFITS SHALL BE CAPABLE OF RESISTING THE DESIGN PRESSURES SPECIFIED FOR WALLS ADJACENT TO THE SOFFIT.

CC8. FOR ROOFTOP EQUIPMENT PER FBC 1609.8 LATERAL FORCES SHALL BE MULTIPLIED BY GCf = 1.9 FOR ROOFTOP STRUCTURES AND EQUIPMENT WITH Af LESS THAN 0.1Bh LOCATED ON BUILDING OF ALL HEIGHTS. GCf SHALL BE PERMITTED TO BE REDUCED LINEARLY FROM 1.9 TO 1.0 AS THE VALUE OF Af IS INCREASED FROM 0.1Bh TO Bh.

CC9. FOR ROOFTOP EQUIPMENT PER FBC 1609.8 UPLIFT FORCES SHALL BE MULTIPLIED BY GCr = 1.5 FOR ROOFTOP STRUCTURES AND EQUIPMENT WITH Ar LESS THAN 0.1BL LOCATED ON BUILDING OF ALL HEIGHTS. GCr SHALL BE PERMITTED TO BE REDUCED LINEARLY FROM 1.5 TO 1.0 AS THE VALUE OF Ar IS INCREASED FROM 0.1BL TO BL.

CC10. EQUIPMENT PRESSURE q (ULTIMATE) = 53 PSF ; EQUIPMENT PRESSURE q (NOMINAL) = 32 PSF

COMPONENT & CLADDING ULTIMATE WIND PRESSURES

SURFACE	ZONE	EFFECTIVE WIND AREAS (SQ FT) 10	20	50	100
ROOF FIELD	1	39 / -70	37 / -69	35 / -67	34 / -66
ROOF EDGE	2	39 / -107	37 / -97	35 / -84	34 / -75
ROOF CORNER	3	39 / -152	37 / -129	35 / -98	34 / -75
WALL FIELD	4	66 / -70	64 / -68	61 / -65	59 / -63
WALL CORNER	5	66 / -82	64 / -78	61 / -72	59 / -68

COMPONENTS & CLADDING SOLID PARAPET ULTIMATE WIND PRESSURES (PSF)

AREA	EFFECTIVE WIND AREA (SQ. FT.) ≤10	≤20	≤50	≤100	≤500
CASE A : INTERIOR ZONE	122	111	95	83	78
CASE A : CORNER ZONE	168	142	109	83	78
CASE B : INTERIOR ZONE	-86	-81	-76	-71	-61
CASE B : CORNER ZONE	-98	-91	-83	-76	-61

1 COMPONENT & CLADDING ULTIMATE DESIGN WIND LOADS
S0-1-03 REF: SCALE: NTS

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

http://www.aecom.com

REGISTRATION

VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Vincent R Vaccarello -Wadehra
Digitally signed by Vincent R Vaccarello-Wadehra
Date: 2019.08.22 17:57:21 -04'00'

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUGUST 23, 2019	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2019	90% CONSTRUCTION DOCUMENTS
	JUNE 27, 2019	STEEL DESIGN PACKAGE
	JUNE 7, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

WIND LOADS

SHEET NUMBER

S0-1-03

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

©2016 AECOM Corporation

Project Management Initials: Designer: Designer Checked: Checker Approved: Approver/RCH E1 30"x42"

Last Plotted: 8/22/2019 5:35:42 PM
Filename: BIM 360:0060139 - Publix HQ/60601397_Publix HQ_STRUCT_R2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper