Project Management Initials:
Designer: Designer Checked: Checker Approved: ApproverARCH E1 30"x42"

Building Inspection Division
Lakeland
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Date: 11/15/19
Permit Number: BLD19-06035

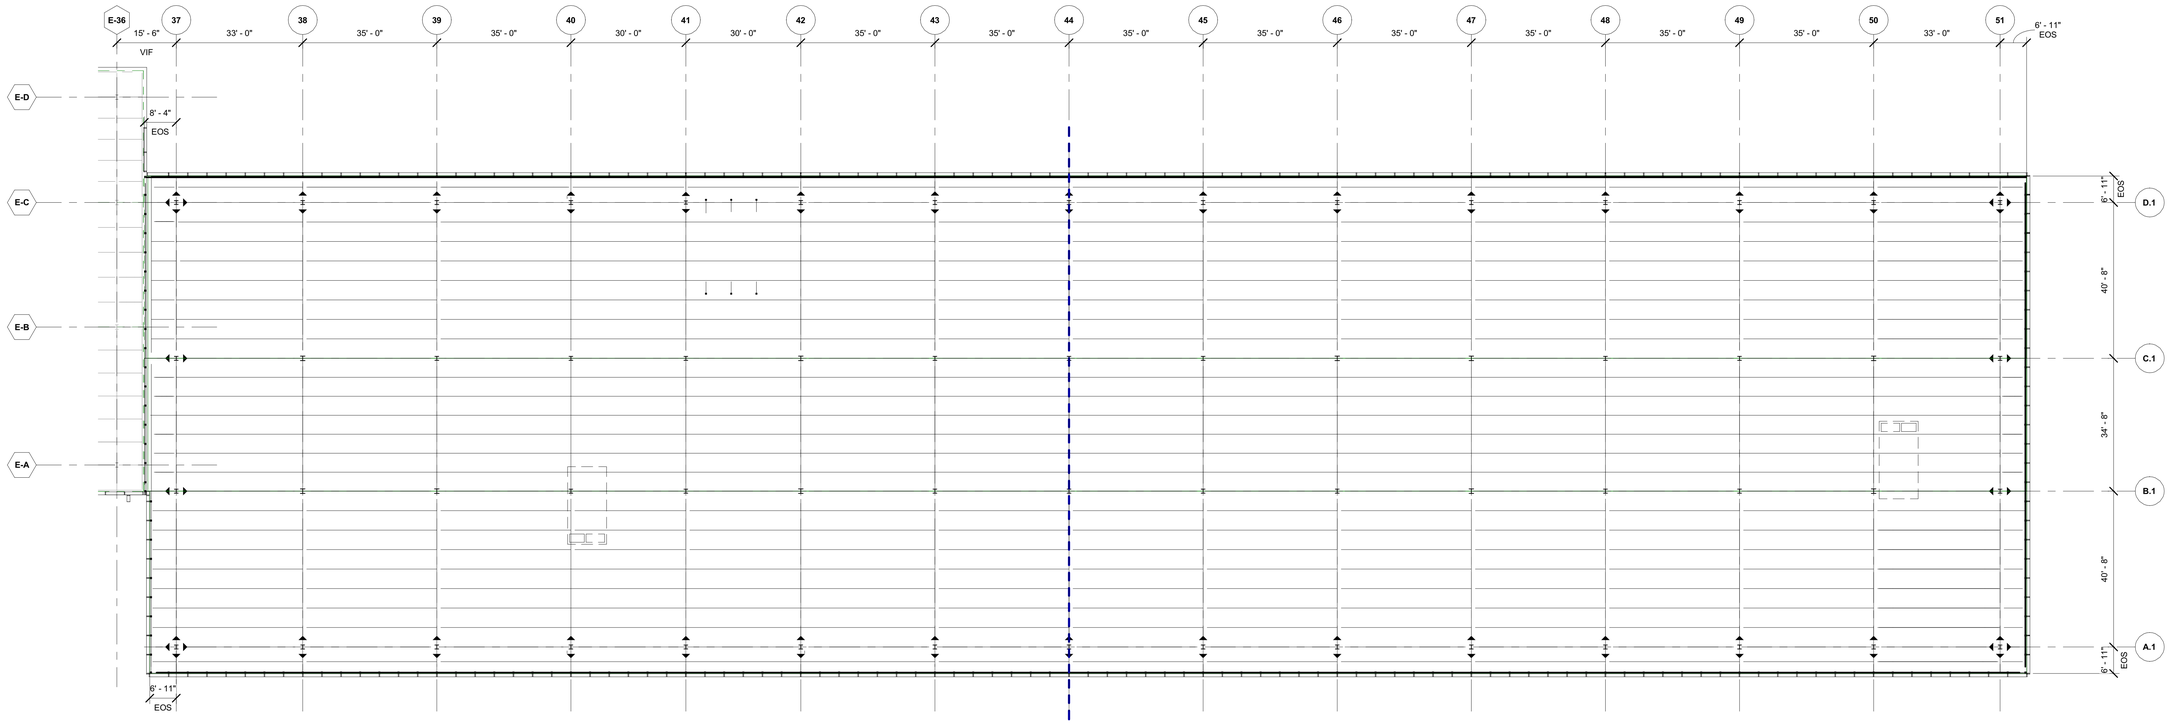

1 OVERALL PLAN - ROOF
S2-2-40 REF: SCALE: 1/16" = 1'-0"

SCALE: 1/16" = 1'-0" 0 4' 8' 16' 32' 48"

N TN

ROOF FRAMING PLAN NOTES:

1. SEE SHEET ***S0-1-01*** & ***S0-1-02*** FOR GENERAL NOTES.
2. SEE SHEET ***S0-1-03*** FOR WIND LOADS.
3. BOTTOM OF DECK ELEVATION IS AS NOTED ON PLANS. TOP OF STEEL ELEVATIONS FOR BEAMS AND GIRDERS SHALL BE DETERMINED FROM JOIST SEAT DEPTHS AND BOTTOM OF DECK ELEVATIONS.
4. ROOF SYSTEM IS ROOF DECK SUPPORTED BY STEEL JOISTS AND BEAMS. ROOF DECK SHALL BE 1 1/2" DEEP, TYPE B, 18 GAGE GALVANIZED (G90) STEEL ROOF DECKING. ROOF DECK SHALL BE PLACED WITH A TWO-SPAN CONDITION MINIMUM. NO SINGLE SPANS ARE ALLOWED WITHOUT WRITTEN APPROVL OF ENGINEER-OF-RECORD.
5. REFER TO ARCHITECTURAL, MECHANICAL, AND PLUMBING DRAWINGS FOR PENETRATIONS NOT SHOWN. REFER TO DETAILS ***A1*** ON SHEET ***S6-1-03***. CONTRACTOR TO VERIFY SIZE AND LOCATION OF FRAMED OPENINGS. CONTACT E.O.R IF OPENING IS NOT SHOWN ON PLANS AND NEEDS ADDITIONAL SUPPORT FRAMING.
6. SEE SHEETS ***S4-1-01, S4-1-02, & S4-1-03*** FOR FRAME ELEVS W/ FRAME CONNECTION DESIGN LOADS NOT SHOWN ON PLAN.
7. VERIFY ALL DIMENSIONS, ELEVATIONS AND SLAB FINISHES WITH ARCHITECTURAL DRAWINGS BEFORE CONSTRUCTION
8. JOIST MANUFACTURER SHALL DESIGN ALL ROOF JOISTS AND BRIDGING PER SJI REQUIREMENTS. REFER TO DETAILS ***A1/S6-1-01*** FOR TYPICAL BRIDGING.
9. REFER TO DETAIL ***A3/S6-1-01*** FOR STIFFENING OF STEEL JOISTS AT CONCENTRATED LOADS.
10. JOIST ENGINEER AND MANUFACTURER SHALL DESIGN JOISTS TO SUPPORT THE UNIFORM LOADS LISTED IN THE SJI LOADING TABLES IN ADDITION TO THE CONCENTRATED AND UNIFORM COLLATERAL LOADS SHOWN ON THESE DOCUMENTS.
11. ALL STEEL FRAMING LOCATIONS AT RTU'S MUST BE COORDINATED BY THE CONTRACTOR WITH THE SELECTED RTU EQUIPMENT.
12. REFER TO DETAILS ON ***S6-1-01 & S6-1-02*** FOR TYPICAL STEEL FRAMING CONNECTIONS.
13. FOR CONTINUOUS PERIMETER ANGLE OR BENT PLATE SPLICE, SEE DETAIL ***A2/S6-1-03.***

ROOF LEGEND:

LOAD A = DENOTES ULTIMATE LOADS AS FOLLOWS:
- DEAD LOAD = 1,300 LBS
- WIND UPLIFT = 1,200 LBS
- WIND OVERTURNING (UP OR DOWN) = 1,200 LBS

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

http://www.aecom.com

REGISTRATION

VINCENT RAJ VACCARELLO-WADEHRA
LICENSE NO. 81224
STATE OF FLORIDA
PROFESSIONAL ENGINEER

VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Vincent R Vaccarello-Wadehra
Digitally signed by Vincent R Vaccarello-Wadehra
Date: 2019.08.22 17:58:22 -04'00'

KEY PLAN

EXISTING	A	B

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUGUST 23, 2019	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2019	90% CONSTRUCTION DOCUMENTS
	JUNE 27, 2019	STEEL DESIGN PACKAGE
	JUNE 7, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

OVERALL PLAN - ROOF

SHEET NUMBER

S2-2-40

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

Last Plotted: 8/22/2019 5:36:38 PM
Filename: BIM 360:60601397-Publix HQ\60601397_Publix HQ_STRUCT_R2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper

©2016 AECOM Corporation