Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Lakeland
Date: 11/15/19
Permit Number: BLD19-06035

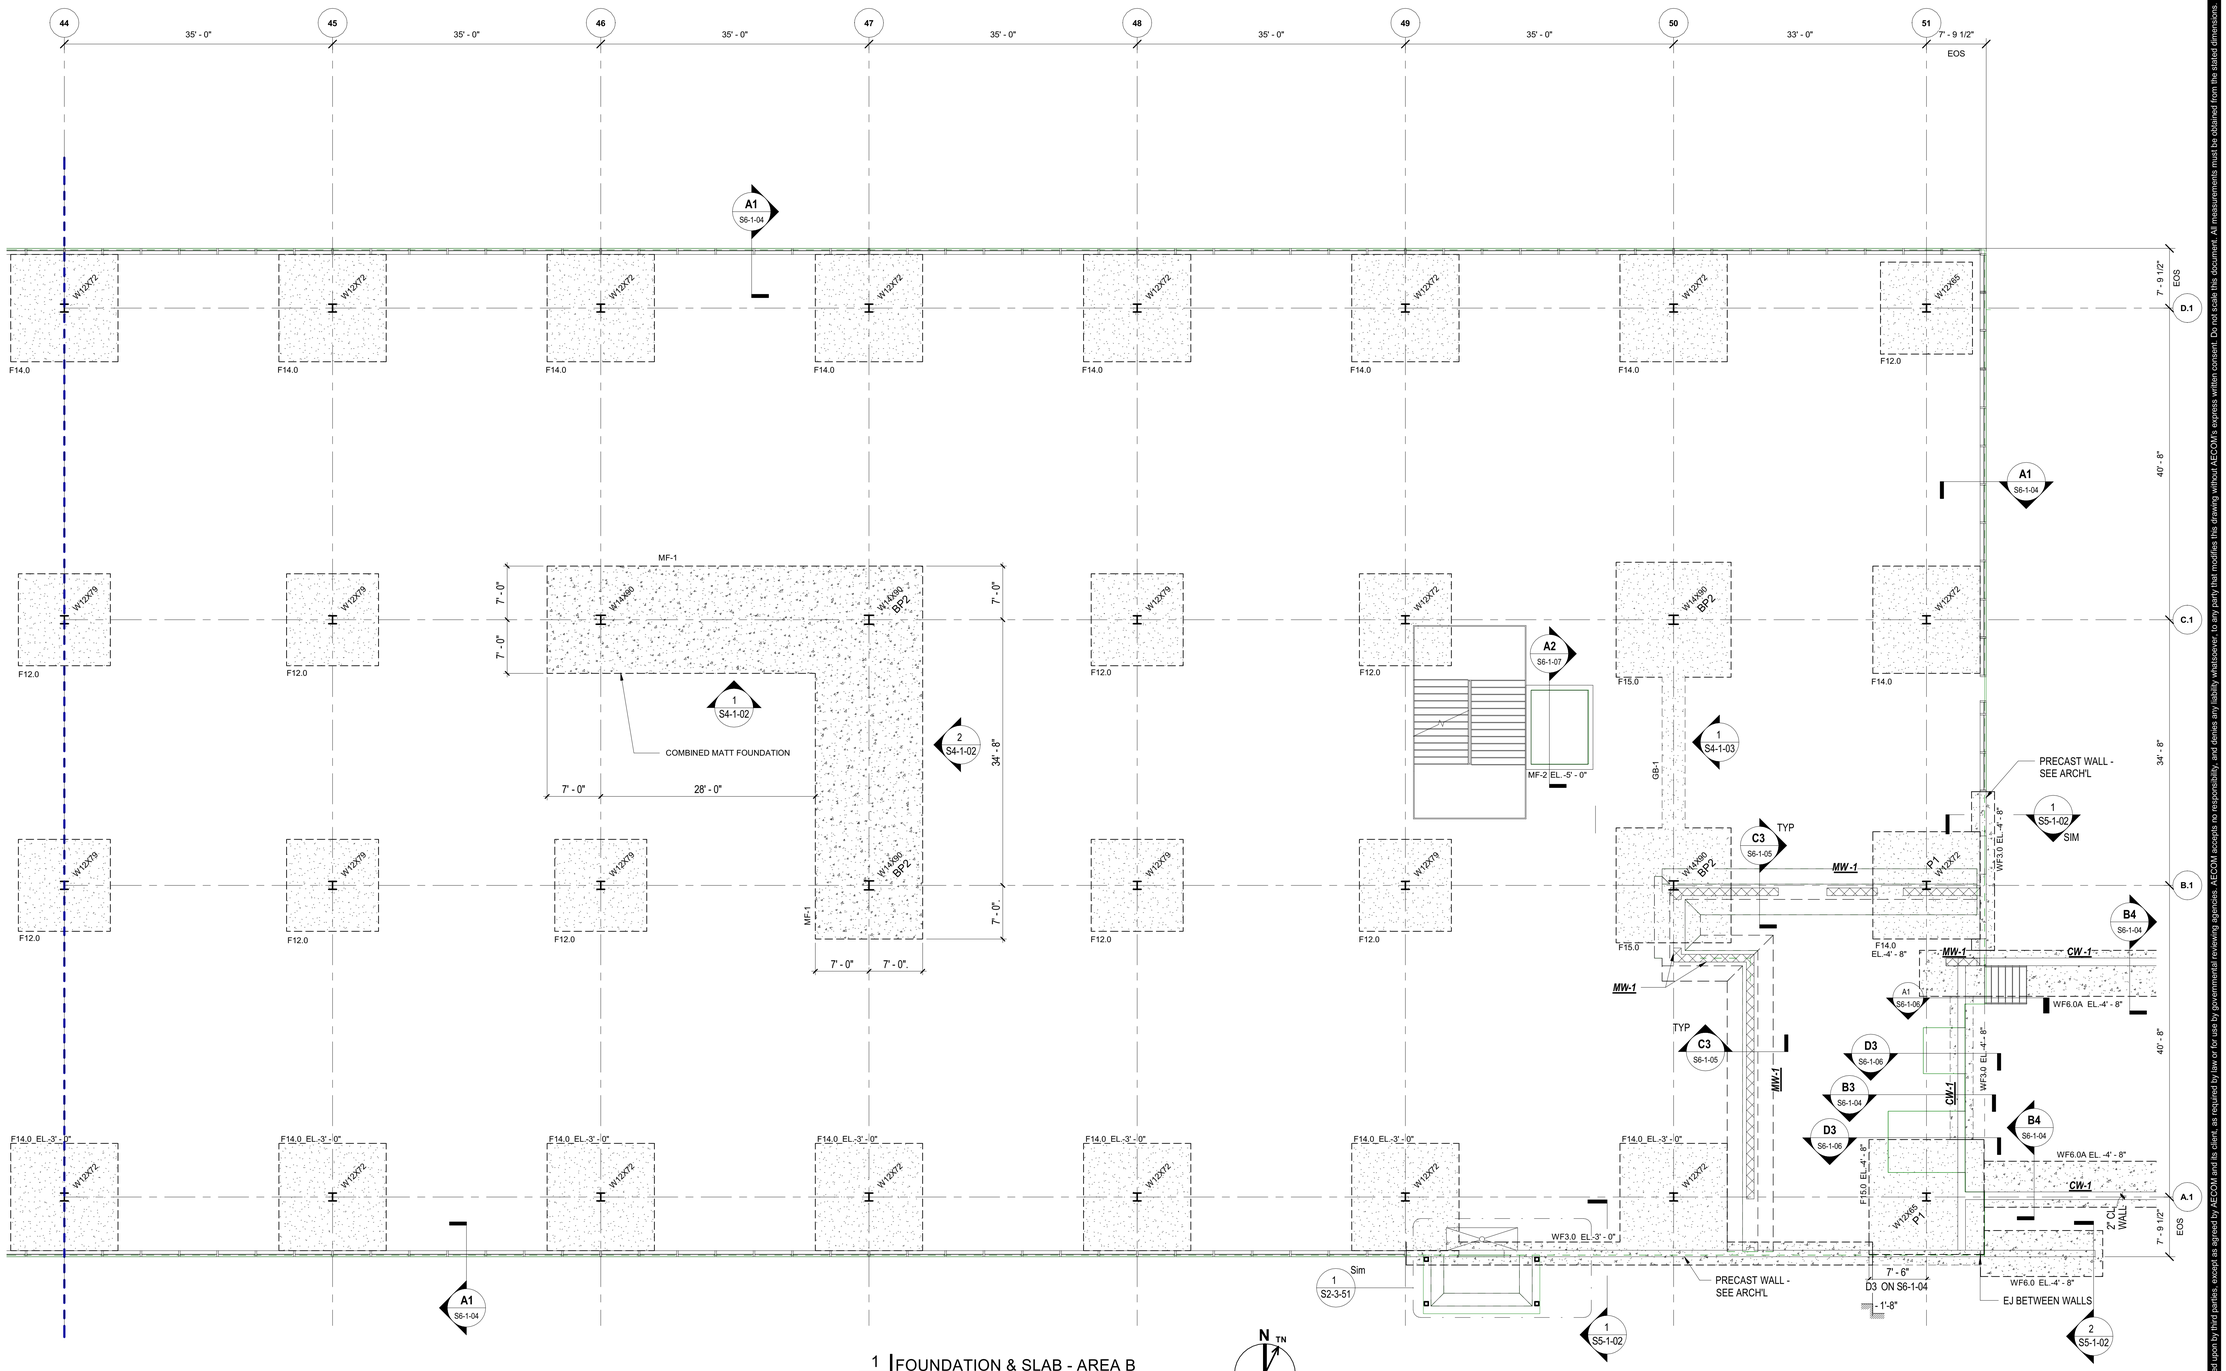

1 FOUNDATION & SLAB - AREA B
S2-3-12 REF:S4-1-01 SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0" 0 2' 4' 8' 16' 24'

N TN

FOUNDATION PLAN NOTES:

1. **4"** CONCRETE SLAB ON GRADE REINFORCED W/ MIN. #3 @ 12" O.C. CENTERED AT SLAB MID-DEPTH OVER 15 MIL VAPOR RETARDER OVER 6" OF DENSE GRADED AGGREGATE BASE OVER WELL- COMPACTED STRUCTURAL FILL PER GEOTECHNICAL. TYP
2. SEE SHEET ***S0-1-01*** & ***S0-1-02*** FOR GENERAL NOTES.
3. REF. BLDG. FIN. FL. EL. 0'-0" = NGVD. SEE CIVIL DWGS.
4. TOP OF FOUNDATION EL. EQUALS -2' -0" (UNO).
5. SEE DET. ***D1/S6-1-04*** FOR FOUNDATION SCHEDULE.
6. SEE DET. ***D4/S6-1-04*** FOR FOOTING INTERSECTION REINFORCING.
7. SEE SHEET ***S6-1-04*** FOR BASE PLATE AND ANCHOR BOLT DETAILS.
8. SLAB JOINTS TO BE COORDINATED WITH ARCHITECTURAL BUT GENERAL REQUIREMENTS OF 16 FT+/- MAX DIMENSION WITH 256 SF INCLUDED AND A LENGTH TO WIDTH RATIO OF 1.25 SHALL BE MAINTAINED. SEE DET. ***A4 & D1 ON S6-1-06*** FOR TYPICAL SLAB JOINT (S.J.) DETAILS.
9. SEE ARCHITECTURAL DRAWINGS FOR WALL AND BOLLARD LOCATION AND DETAILS.
10. SEE ARCHITECTURAL DRAWINGS AND PLUMBING DRAWINGS FOR FLOOR SLOPES AND DRAINS.
11. SEE PLUMBING AND ELECTRICAL DRAWINGS FOR UNDER SLAB COMPONENTS.
12. FOOTINGS SHALL BE CENTERED UNDER COLUMNS AND WALL CENTERLINES, U.O.N.
13. CONTINUOUS FOOTINGS SHALL BE INTEGRAL WITH COLUMN FOOTINGS.
14. PROVIDE (2)#4x4'-0" DIAGONAL CRACK BARS 2" FROM CORNER @ 3" O.C. CENTERED IN SLAB AT RE-ENTRANT SLAB CORNERS.
15. **"P1"** DENOTES CONCRETE PEDESTAL. SEE DETAIL ***A3/S6-1-04*** FOR PEDESTAL DETAIL.
16. COLUMN BASE PLATE SHALL BE BP-1, UNO.
17. SEE MASONRY WALL SCHEDULE ON ***S6-1-05*** FOR MASONRY WALL INFORMATION.
18. SEE CONCRETE WALL SCHEDULE ON ***S6-1-06*** FOR CONCRETE WALL INFORMATION.

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix.

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

http://www.aecom.com

REGISTRATION

VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Vincent R Vaccarello-Wadehra
Digitally signed by Vincent R Vaccarello-Wadehra
Date: 2019.08.23 10:55:09 -04'00'

KEY PLAN

EXISTING	A	B

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUGUST 23, 2019	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2019	90% CONSTRUCTION DOCUMENTS
	JUNE 27, 2019	STEEL DESIGN PACKAGE
	JUNE 7, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

PARTIAL PLAN FOUNDATION & SLAB AREA B

SHEET NUMBER

S2-3-12

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

©2016 AECOM Corporation

Project Management Initials:
Designer: Designer Checker: Checker Approved: Approver ARCH E1 30"x42"
Last Plotted: 8/23/2019 10:47:14 AM
Filename: BIM 360:60601397-Publix HQ/60601397_Publix HQ_STRUCT_R2019.rvt

Printed on ___% Post-Consumer Recycled Content Paper