Building Inspection Division
THESE PLANS HAVE BEEN REVIEWED FOR COMPLIANCE WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE
Date: 11/15/19
Permit Number: BLD19-06035

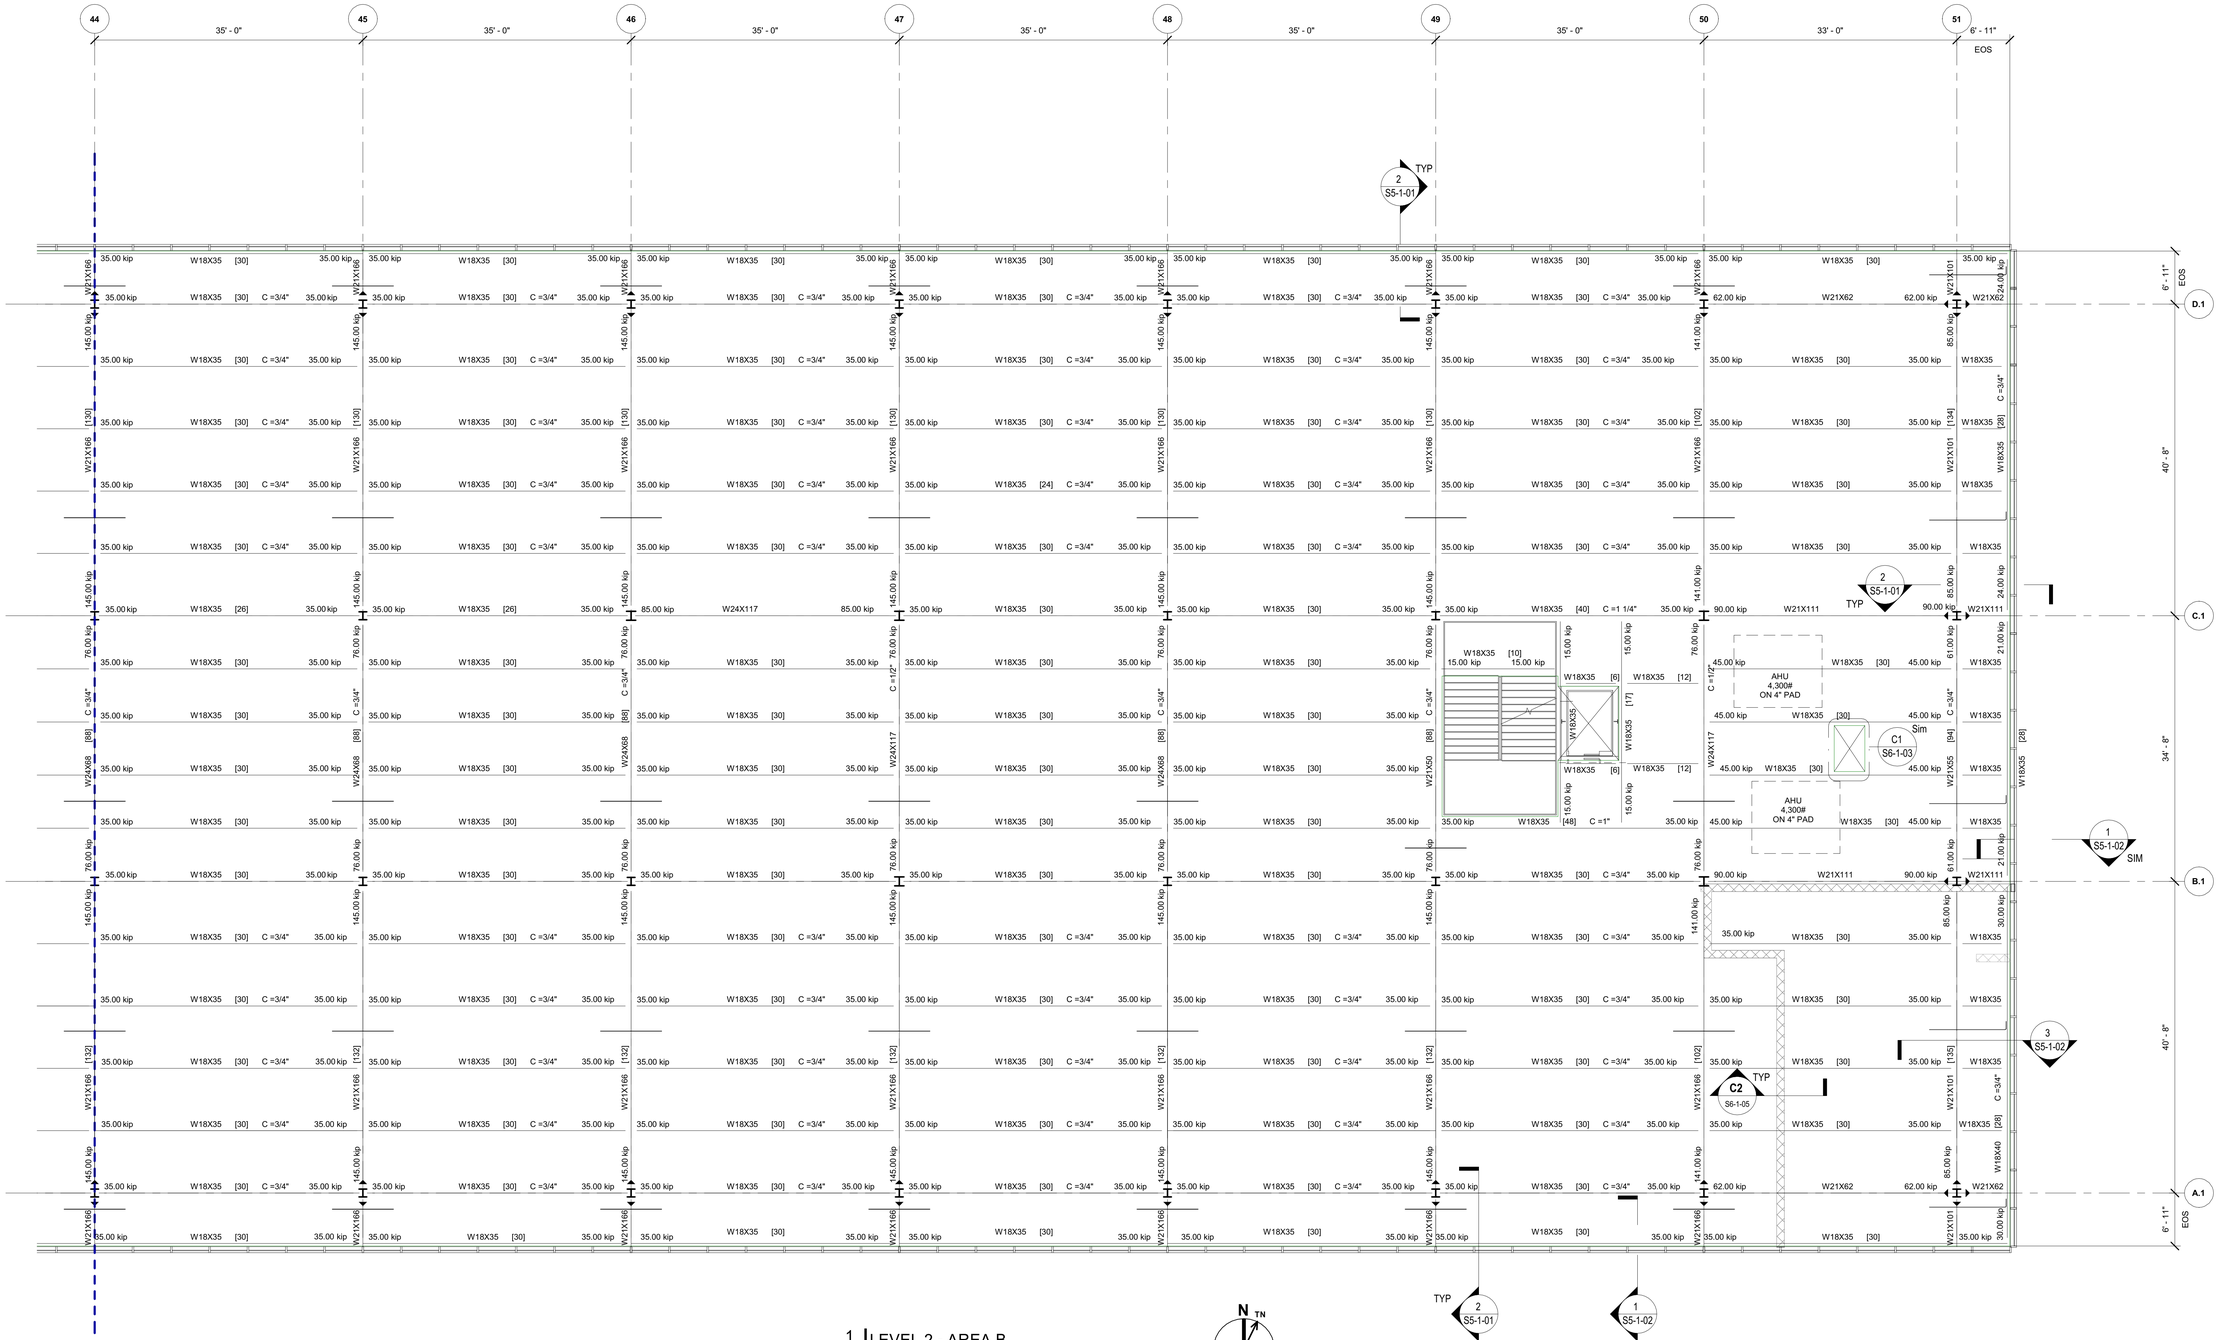

1 LEVEL 2 - AREA B

S2-3-22 REF:S2-3-50 SCALE: 1/8" = 1'-0"

SCALE: 1/8" = 1'-0" 0 2' 4' 8' 16' 24'

N TN

2ND FLOOR FRAMING PLAN NOTES:

1. SEE SHEET ***S0-1-01*** & ***S0-1-02*** FOR GENERAL NOTES.
2. SEE SHEET ***S0-1-03*** FOR WIND LOADS.
3. FOR CONTINUOUS PERIMETER ANGLE OR BENT PLATE SPLICE, SEE DETAIL ***A2/S6-1-03***.
4. SEE SHEETS ***S4-1-01, S4-1-02, & S4-1-03*** FOR FRAME ELEVS W/ FRAME CONNECTION DESIGN LOADS NOT SHOWN ON PLAN.
5. REFER TO ARCHITECTURAL, MECHANICAL, AND PLUMBING DRAWINGS FOR PENETRATIONS NOT SHOWN. REFER TO DETAILS ***B1, B2,*** AND ***C1*** ON SHEET ***S6-1-03***. CONTRACTOR TO VERIFY SIZE AND LOCATION OF FRAMED OPENINGS. CONTACT E.O.R IF OPENING IS NOT SHOWN ON PLANS AND NEEDS ADDITIONAL SUPPORT FRAMING.
6. VERIFY ALL DIMENSIONS, ELEVATIONS AND SLAB FINISHES WITH ARCHITECTURAL DRAWINGS BEFORE CONSTRUCTION.
7. TOP OF CONCRETE ELEVATION IS EL. 20'-0", UNLESS OTHERWISE NOTED ON PLAN.
8. TOP OF STEEL BEAM ELEVATIONS IS 19'-5 3/4", UNLESS OTHERWISE NOTED ON PLAN.
9. FLOOR STRUCTURE CONSISTS OF 3 1/4" LIGHT WEIGHT CONCRETE ON 3" DEEP, 20 GAGE GALVANIZED (G60) CELLULAR COMPOSITE STEEL DECK (6 1/4" TOTAL THICKNESS). STEEL DECK SHALL BE PLACED WITH A TWO-SPAN CONDITION MINIMUM. NO SINGLE SPANS ARE ALLOWED WITHOUT WRITTEN APPROVAL OF ENGINEER-OF-RECORD. COMPOSITE SLAB SHALL BE REINFORCED WITH WELDED WIRE FABRIC REINFORCEMENT 4x4-W4.0xW4.0.
10. REFER TO DETAIL ***B2/S6-1-02*** FOR REINFORCEMENT PLACEMENT IN COMPOSITE SLABS.
11. REFER TO ***B4/S6-1-02*** FOR CONSTRUCTION JOINT IN COMPOSITE SLABS, IF REQUIRED.
12. PLACE #4x8'-0" @ 12" PERPINDICULAR TO STEEL GIRDERS BELOW THE WWF PER DETAIL ***B3/S6-1-02***.
13. DECK MANUFACTURER TO COORDINATE PROPER SURFACE PREPARATION WITH FIRE PROOFING CONTRACTOR FOR PROPER ADHERANCE OF FIREPROOFING.
14. HEADED STUDS SHALL BE MIN. 3/4"Øx5 1/2".
15. PROVIDE (2) #4x5'-0" DIAGONAL BARS @ 3" O.C. CTRD. ON SLAB OVER PERIMETER REINFORCEMENT AS SHOWN ON PLAN AT RE-ENTRANT CORNERS.
16. PROVIDE (2) #5 CONTINUOUS BARS AS CHORD REINFORCEMENT PLACED AT SLAB MID-DEPTH, 2" FROM PERIMETER ANGLE AND AT 3" O.C. TYP. AROUND FLOOR PERIMETER. CONTINUE MIN. 4'-0" PAST CORNERS TYPICAL AT RE-ENTRANT CORNERS.
17. REFER TO DETAIL ***D4/S6-1-06*** FOR HOUSEKEEPING PAD OVER STRUCTURAL PAD.
18. REFER TO DETAILS ON ***S6-1-01 & S6-1-02*** FOR TYPICAL STEEL FRAMING CONNECTIONS.
19. ALL STEEL THAT IS PERMANENTLY EXPOSED TO EXTERIOR CONDITIONS OR IS IN UNCONDITIONED SPACE SHALL BE HOT DIPPED GALVANIZED.

LEGEND

#4X8'-0" @ 12" OC

#4X12'-0" @ 12" OC

This drawing has been prepared for the use of AECOM's client and may not be used, reproduced or relied upon by third parties, except as agreed by AECOM and its client, as required by law or for use by governmental reviewing agencies. AECOM accepts no responsibility, and denies any liability whatsoever to any party that modifies this drawing without AECOM's express written consent. Do not scale this document. All measurements must be obtained from the stated dimensions.

AECOM
BATSON-COOK CONSTRUCTION

PROJECT

PUBLIX HEADQUARTERS BUILDING ADDITION AND PARKING LOT EXPANSION

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

CLIENT

Publix

3300 PUBLIX CORPORATE PARKWAY
LAKELAND, FL 33811

www.publix.com

CONSULTANT

AECOM

AECOM TECHNICAL SERVICES, INC.
800 Douglas Entrance
North Tower, 2nd Floor
Coral Gables, FL 33134
305.444.4691 tel 305.447.3580 fax
www.aecom.com

ARCHITECTURE
LICENSE NO. AA26000687

ENGINEERING
CA LIC. NO. 8115

http://www.aecom.com

REGISTRATION

VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY VINCENT RAJ VACCARELLO-WADEHRA, PROFESSIONAL ENGINEER, STATE OF FLORIDA, LICENSE NO. 81224 ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

Vincent R Vaccarello-Wadehra

Digitally signed by Vincent R Vaccarello-Wadehra
Date: 2019.08.23 10:54:44 -04'00'

KEY PLAN

EXISTING | A | B

ISSUE/REVISION

I/R	DATE	DESCRIPTION
0	AUGUST 23, 2019	CONSTRUCTION DOCUMENTS
	AUGUST 16, 2019	90% CONSTRUCTION DOCUMENTS
	JUNE 27, 2019	STEEL DESIGN PACKAGE
	JUNE 7, 2019	35% DESIGN COMPLETION

PROJECT NUMBER

60601397

SHEET TITLE

PARTIAL PLAN - LEVEL 2 AREA B

SHEET NUMBER

S2-3-22

NOTICE: THE OFFICIAL RECORD OF THIS SHEET IS THE ELECTRONIC FILE SIGNED AND SEALED UNDER RULE 61G15-23.004, F.A.C.

©2016 AECOM Corporation

Project Management Initials: Designer: Designer Checked: Checker Approved: Approver/ARCH E1 30"x42"
Last Plotted: 9/23/2019 10:47:29 AM
Filename: Bldl 3600/60601397-Publix HQ/60601397_Publix HQ_STRUCT_B2019.rvt
Printed on ____% Post-Consumer Recycled Content Paper